THORN

92900114 <FORCELED 6000 COR MWS RF QC L840

	IP66	D	halogen	IK10		CE				850°C	Ta - 20 +35

A compact IP66, dust and moisture proof LED luminaire. Electronic, DALI dimmable control gear. Class I electrical, IK10. Canopy: fully recyclable aluminium painted. Diffuser: UV stabilised polycarbonate with linear prisms. Toggles: stainless steel. For surface, BESA or suspended mounting. Quick-fix brackets supplied for surface mounting. Mounting kits for conduit, chain suspension and catenary suspension are available as accessories. Equipped with quick fit electrical connection. With integral motion sensor for corridor function control and radio frequency module (Master). Complete with 4000K LED.

TLG_FORL_F_PDBUNLIT.jpg

Dimensions: 735 x 180 x 95 mm
Luminaire input power: 53 W
Luminaire luminous flux: 6300 lm
Luminaire efficacy: 119 lm/W
Weight: 5.5 kg

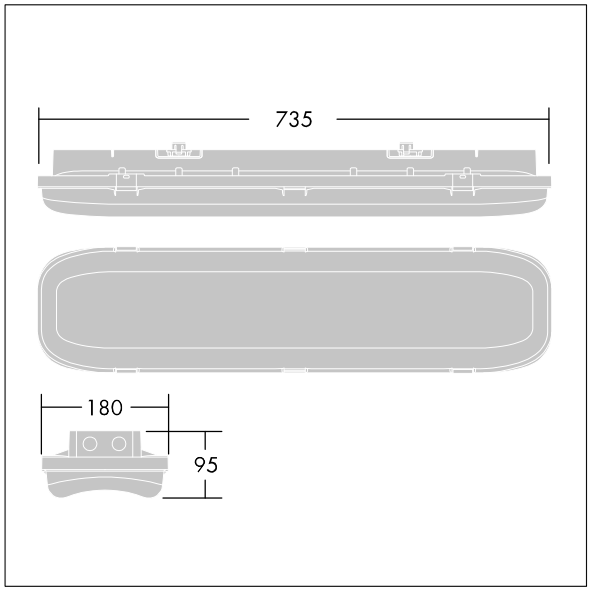

TLG_FORL_M_LED.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

92900114 <FORCELED 6000 COR MWS RF QC L840

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting