Omega LED

96630183 <OMEGA LED 3300-830 HFIX E3 Q597

$T_{p(b)}$		IP20 IP44		CE	650°C	T_a 0 +25

Omega LED

A recessed/surface/suspended LED luminaire with a slim 12mm profile. Electronic, DALI dimmable control gear with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP44 from below, IP44_IP20 from above, IK02. Body: sheet steel, white (RAL9016). Diffuser: UV-stabilized opal acrylic. Electrical connection via push wire terminal blocks, loop in/loop out possible. Complete with 3000K LED

Dimensions: 597 x 597 x 12 mm
Luminaire input power: 27.3 W
Luminaire luminous flux: 3150 lm
Luminaire efficacy: 115 lm/W
Weight: 6.2 kg

TLG_OMGL_F_SLIM.jpg

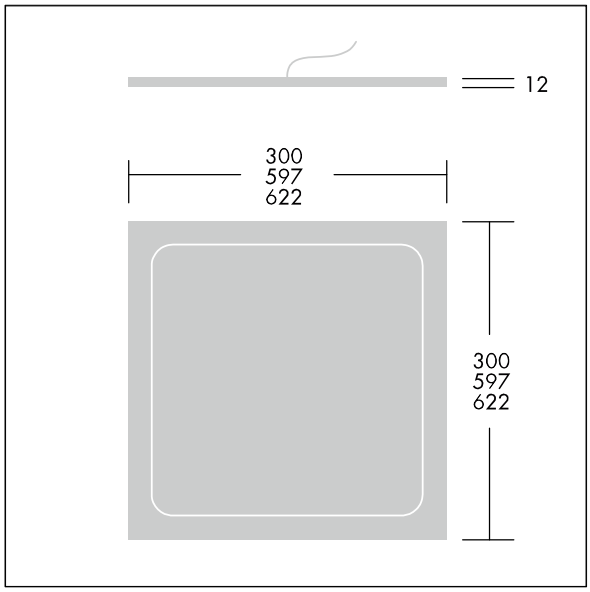

TLG_OMGL_M_LDSQ.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega LED

96630183 <OMEGA LED 3300-830 HFIX E3 Q597

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting