Omega Pro

96630209 <OMEGA PRO LED4200-840 HFIX E3TX Q597

$T_{p(b)}$ | IP20 / IP40 | IK03 | 650 °C | T_a 0 +25

Omega Pro

A ceiling recessed edge lit LED luminaire with a slim 12mm profile. For installation from below into concealed metal ceilings. Electronic, DALI dimmable control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP40 from below, IP40_IP20 from above, IK03. Body: sheet steel white (RAL9016). Diffuser: UV-stabilised, Glare ProTech prismatic optic. Electrical connection via push wire terminal blocks, loop in/loop out possible. Complete with 4000K LED

Dimensions: 597 x 597 x 12 mm
Luminaire input power: 32 W
Luminaire luminous flux: 4200 lm
Luminaire efficacy: 131 lm/W
Weight: 7.18 kg

TLG_OMPL_F_square_pers.jpg

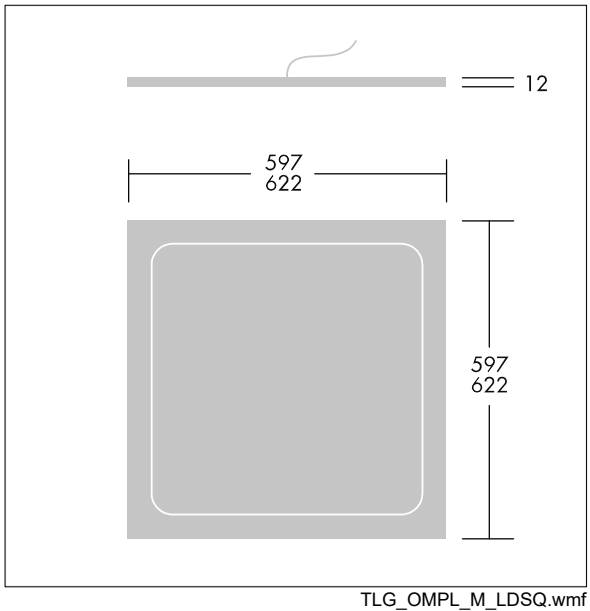

TLG_OMPL_M_LDSQ.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Omega Pro

96630209 <OMEGA PRO LED4200-840 HFIX E3TX Q597

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting