Punch

96667212 <PUNCH 3 D 4000-830 MSP HFIX L12

IP20 | IK03 | 650°C | Ta 0 +25

Punch

A slim, suspended luminaire with direct distribution. DALI dimmable LED driver. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Louvre: glossy aluminium, double parabolic. Class I electrical, IP20, Impact strength: IK03. Electrical connection via pre-installed power cord (2.5m). Complete with 3000K LED. Suspension kit to be ordered separately.

TLG_PNCH_F_PENDEL.jpg

Dimensions: 1262 x 162 x 50 mm
Luminaire input power: 35 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 109 lm/W
Weight: 3.5 kg

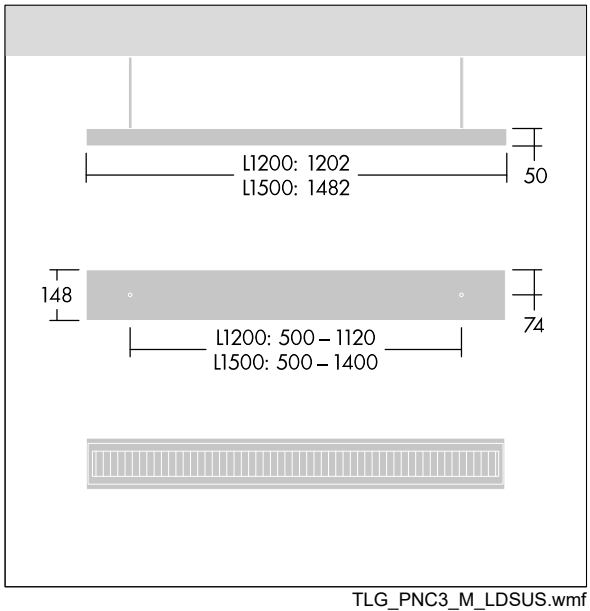

TLG_PNC3_M_LDSUS.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Punch

96667212 <PUNCH 3 D 4000-830 MSP HFIX L12

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting