



## Qba LED

### Compact, rectangular floodlight using white and coloured LEDs to creatively light façades and architectural features

- Intensive LED technology in static or dynamic versions: saturated monochromatic with 8 LEDs in Red, Green, Blue and two whites (3000K and 4000K) as well as a RGB colour mixing version with 4 LEDs driven by DMX protocol. Amber LED colour on request.
- A selection of attachments creates a variety of beam distributions, including a glass filter to decrease the colour temperature on white versions
- Integral power supply for monochromatic versions and power supply plus DMX driver for the RGB version
- Uses the same body as Qba 2 enabling visual integration with existing schemes



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

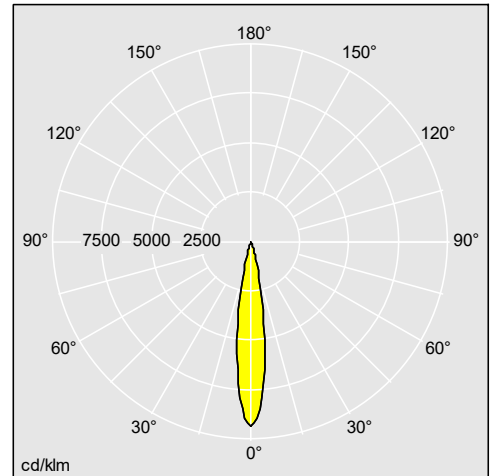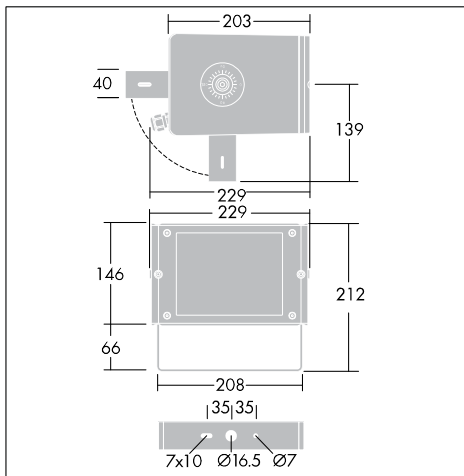

96272102

### Material/Finish

Body, frame and accessories: die-cast aluminium ENAB44100 with textured grey powder coated finish (close to RAL 7043)  
 Body screws: stainless steel  
 Attachment retaining screws: nickel plated brass  
 Front glass: toughened glass  
 Alternative RAL colours on request

### Installation/Mounting

Adjustable on a stirrup. Aiming is simplified by an indicator on the body sides, locked via a central Ø8mm allen screw. Short stirrup accessory available for close wall mounting. Easy rear access to electrical connector. Cable gland for Ø6-11mm cable. An additional cable gland for through wiring is available on request. For DMX connection (RGB version only) a DMX cable is required for creative effects. For DMX512 cable the connection requires two 7mm cable glands. Data+, data- and ground are routed to the DMX connector.