



Avenue D2

An elegant and efficient lantern with a drop like enclosure to provide a unique lighting signature and comfortable light

- IDA Dark Sky Approved
- *IDA fixture seal of approval relates to ≤ 3000 K only and clear enclosures. Luminaires must be mounted as photometered.
- Respectful of the environment with warm color temperature and reduced upward lighting $<1\%$ with dedicated optics (RSC, CST)
- ZD4i certified on request
- Decorative lampshield in copper or steel to create your own identity



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

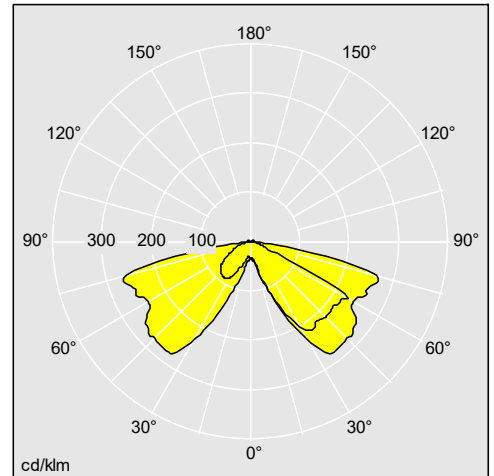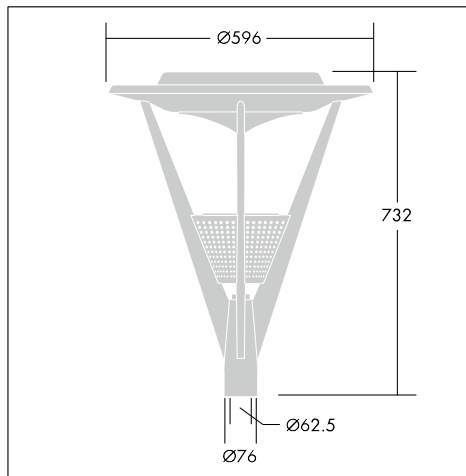

96261370

Material/Finish

Base and arms: die cast aluminium (EN AC-46000, standard corrosion class C3).

Canopy: spun aluminium.

Finish: powder coated anthracite textured grey 900 (close to RAL7043). Via myProduct: Texturized light grey (GY), Black (BK) and 48 other RAL possibilities

Lampshield: metallised PC with copper or stainless steel, special varnish to prevent ageing effect and preserve the initial gloss appearance.

Diffuser: UV stabilised PC frosted or clear polycarbonate

Reflector and mirrors (street distribution): high reflective anodised aluminium.

Screw fixings: stainless steel.

Installation/Mounting

Post top mounting: on spigot/columns Ø60mm. Recommended height: 3/4m, coordinated Avenue wall bracket. Spigot: 60mm (length: 90mm). Access to gear and LED module (replaceable) via 4 screws from the canopy. Product supplied with connector below the lantern or pre-wired with HO5 RN-F cable. Delivered ready to install, complete with factory fitted integral gear, all supplied in one box.