



Alumet Stage II

Elegant column, with an exclusive and flexible offer for multi-directional lighting

- Flexible with multi-positioning and 360° rotation of the spots, create a wide variety of adjustable effects without the need to change the position of the luminaire
- Perfectly designed to offer SmartCity services, and a sustainable resistance to an active city life



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

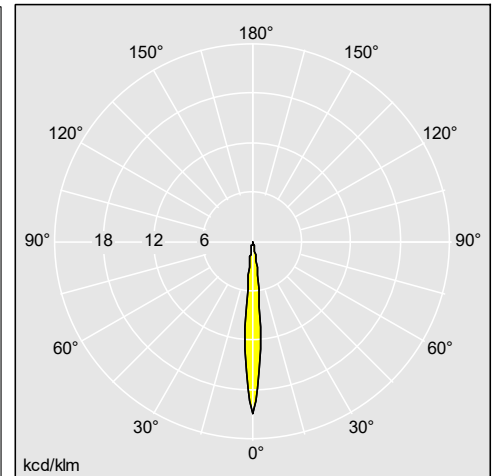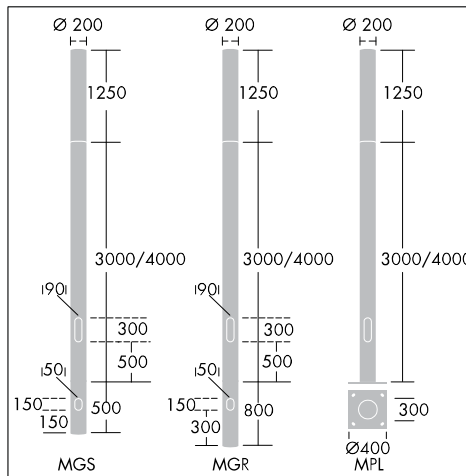

96275341

Material/Finish

Diffuser: clear UV stabilised PC treated with anti-graffiti varnish

Top cap: die-cast aluminium (EN AC-46000), standard corrosion class C3.

Lamp support: polyamid

Lamp housing: die-cast aluminium

Spine: steel

Column: extruded aluminium

Top/Column/Cover: powder coated textured light grey (close to RAL 9006) Other RAL on request

Installation/Mounting

3 or 4m high columns, flange or root mounted (MGR or MGS) Flange: 400 x 400mm, spacings: 300 x 300mm, bolts 18 x 400 (included). Total height (with lit part of 1.25m): 4.25m or 5.25m, Diameter: 200mm. Fixing of the head and optional accessory by one single tool. Access to LED via 2 M6 screws in the top. Easy settings of spots with one tool, possibility to combine types. Access to the driver and electronic tray by lifting up the PC diffuser and the bottom components cover. Pre-wired with 4m cable.