



Aquaforce Pro

The IP66 Aquaforce Pro sets a new standard for moisture and dust-resistant LED lighting

- Damp and dusty conditions: IP66 rated luminaire stands against dust and powerful jets of water. It's unique Drip-Edge-Effect stops dirt and moisture from gathering on the luminaire
- Resistant to water, dust, dirt and impact: This robust luminaire is resistant to the elements, with high IP66 and IK08 rating. A clever drip-edge design avoids dust and dirt depositing on the light output surface
- Wireless communication: Can be controlled individually or in groups by presence or light sensors, and luminaires can even connect to each other wirelessly, for sophisticated control without the need to install any new cabling
- Fit for refurbishment: With a wide range of lumen outputs, up to 10.000 lm, the luminaire is suitable to serve as a one-for-one replacement and with efficiency as high as 167lm/W, the potential savings are significant
- Simple to install, use and maintain. Long mounting sliders make for easy installation, while our unique EasyClick mechanism allows simple, snap-on mounting, and seven different wiring possibilities are available
- Now Aquaforce Pro is also available to be mounted on our CONTUS trunking system



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

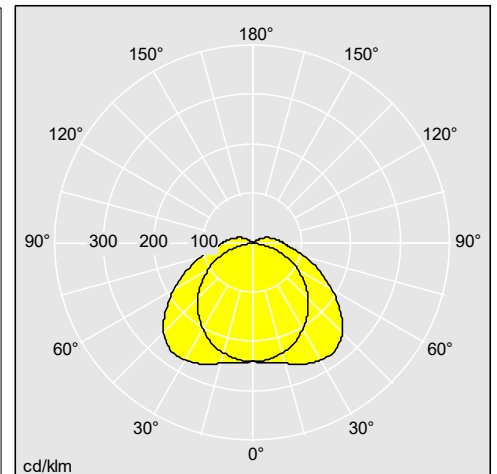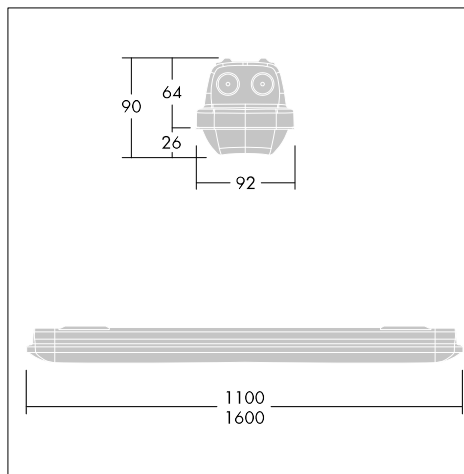

96630756

Material/Finish

Canopy: light grey polycarbonate (PC)

Diffuser: polycarbonate (PC), high transmission opal diffuser, combining scattering effects inside material with refraction prisms. Canopy and diffuser are always the same material.

Installation/Mounting

Patented snap-on mechanism EasyClick for rapid, clipless mounting and opening of diffuser. Approved for indoor use or in canopied outdoor areas. Extended mounting slots for highest on site flexibility.

Surface: suitable for direct surface or BESA mounting. 10 cable entry options at 5 different positions. Quick-fix brackets supplied for surface mounting. Suitable for ceiling and wall mounting (both vertically and horizontally).

Chain suspension: mounting kits for conduit, chain suspension and catenary suspension are available as accessories.

Trunking: available for CONTUS trunking system

Aquaforce Pro

Ordering Guide AQFPRO S (L=1100), AQFPRO L (L=1600)

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
Aquaforce Pro S					
AQFPRO S LED2900-840 PC MB HF	LED		1,7	96630753	E7276230
AQFPRO S LED4300-840 PC MB HF	LED		1,7	96630754	E7276231
AQFPRO S LED5200-840 PC MB HF	LED		1,7	96630755	E7276232
AQFPRO S LED2900-840 PC MB HF QC3	LED		1,73	96630972	
AQFPRO S LED4300-840 PC MB HF QC3	LED		1,73	96630973	
AQFPRO S LED5200-840 PC MB HF QC3	LED		1,73	96630975	
AQFPRO S LED4300-840 PC WB HF	LED		1,7	92901916	
AQFPRO S LED4300-840 PC WB HF TW	LED		1,95	92902506	
AQFPRO S LED5200-840 PC WB HF	LED		1,849	92901935	
AQFPRO S LED2900-840 PC WB HF	LED		1,7	92901967	
AQFPRO S LED4300-840 PM MB HF	LED		1,47	92912152	
AQFPRO S LED4300-840 PM WB HF TW	LED		1,72	92918922	E7215562
AQFPRO S LED4300-840 PM WB HF	LED		1,47	92920522	E7215563
AQFPRO S LED4300-840 PM MB HF TW	LED		1,72	92922802	
Aquaforce Pro S, emergency					
AQFPRO S LED2900-840 PC MB HF E3	LED		2,1	96630981	
AQFPRO S LED4300-840 PC MB HF E3	LED		2,1	96630982	
AQFPRO S LED4300-840 PC WB HF E3	LED		2,1	92901915	
AQFPRO S LED2900-840 PC WB HF E3	LED		2,1	92903219	
Aquaforce Pro S, dimmable					
AQFPRO S LED4300-840 PC MB HFI	LED		1,7	96630794	
AQFPRO S LED2900-840 PC MB HFI	LED		1,7	96630976	
AQFPRO S LED2900-840 PC MB HFI QC5	LED		1,73	96630977	
AQFPRO S LED4300-840 PC MB HFI QC5	LED		1,73	96630978	
AQFPRO S LED5200-840 PC MB HFI	LED		1,7	96630979	
AQFPRO S LED5200-840 PC MB HFI QC5	LED		1,73	96630980	
AQFPRO S LED4300-840 PC WB HFI	LED		1,5	92901897	
AQFPRO S LED2900-840 PC WB HFI	LED		1,5	92903362	
AQFPRO S LED5200-840 PC WB HFI	LED		1,7	92902262	
Aquaforce Pro S, dimmable, emergency					
AQFPRO S LED2900-840 PC MB HFI E3D	LED		2,1	96630983	
Aquaforce Pro S, sensor					
AQFPRO S LED2900-840 PC MB MWS	LED		1,74	96630985	
AQFPRO S LED4300-840 PC MB MWS	LED		1,74	96630987	
AQFPRO S LED5200-840 PC MB MWS	LED		1,74	96630989	
Aquaforce Pro S, sensor, corridor function					
AQFPRO S LED2900-840 PC MB MWCF	LED		1,74	96630986	
AQFPRO S LED4300-840 PC MB MWCF	LED		1,74	96630988	
AQFPRO S LED5200-840 PC MB MWCF	LED		1,74	96630990	
Aquaforce Pro L					
AQFPRO L LED4300-840 PC WB HF	LED		2,1	96630756	E7276233
AQFPRO L LED6400-840 PC MB HF	LED		2,1	96630757	E7276234

Aquaforce Pro

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
AQFPRO L LED8000-840 PC MB HF	LED		2,1	96630758	E7276235
AQFPRO L LED6400-840 PC MB HF QC3	LED		2,13	96630793	
AQFPRO L LED4300-840 PC WB HF QC3	LED		2,13	96630971	
AQFPRO L LED8000-840 PC MB HF QC3	LED		2,13	96630974	
AQFPRO L LED6400-840 PC WB HF	LED		2,1	92901898	
AQFPRO L LED8000-840 PC WB HF	LED		2,5	92901918	
AQFPRO L LED4300-840 PC MB HF	LED		2,1	92903815	
AQFPRO L LED6400-840 PM MB HF TW	LED		2,41	92909807	
AQFPRO L LED8000-840 PM MB HF	LED		2,1	92910472	E7215559
AQFPRO L LED6400-840 PM WB HF	LED		2,1	92910476	E7215560
AQFPRO L LED6400-840 PM WB HF TW	LED		2,41	92912605	E7215561
AQFPRO L LED4300-840 PM WB HF	LED		2,1	92912599	
AQFPRO L LED6400-840 PM MB HF	LED		2,1	92920523	E7215564
AQFPRO L LED6400-840 PM MB HF QC3	LED		2,13	92926172	
AQFPRO L LED10000-840 PC MB HF	LED		2,1	96636097	E7218822
Aquaforce Pro L, emergency					
AQFPRO L LED4300-840 PC WB HF E3	LED		2,5	96631027	
AQFPRO L LED6400-840 PC MB HF E3	LED		2,5	96631028	
AQFPRO L LED6400-840 PM WB HF E3	LED		2,5	92929724	
AQFPRO L LED6400-840 PM MB HF E3	LED		2,5	92932124	
Aquaforce Pro L, dimmable					
AQFPRO L LED4300-840 PC WB HFI	LED		2,1	96631021	
AQFPRO L LED4300-840 PC WB HFI QC5	LED		2,13	96631022	
AQFPRO L LED6400-840 PC MB HFI	LED		2,1	96631023	
AQFPRO L LED6400-840 PC MB HFI QC5	LED		2,13	96631024	
AQFPRO L LED8000-840 PC MB HFI	LED		2,1	96631025	
AQFPRO L LED8000-840 PC MB HFI QC5	LED		2,13	96631026	
Aquaforce Pro L, dimmable, emergency					
AQFPRO L LED6400-840 PC WB HFI E3D	LED		2,5	96630795	
AQFPRO L LED4300-840 PC WB HFI E3D	LED		2,5	96631029	
AQFPRO L LED6400-840 PC MB HFI E3D	LED		2,5	96631030	
AQFPRO L LED6400-840 PC WB HFI E3	LED		2,5	92903301	
Aquaforce Pro L, sensor					
AQFPRO L LED4300-840 PC WB MWS	LED		2,14	96631031	
AQFPRO L LED6400-840 PC MB MWS	LED		2,14	96631033	
AQFPRO L LED8000-840 PC MB MWS	LED		2,14	96631035	
Aquaforce Pro L, sensor, corridor function					
AQFPRO L LED4300-840 PC WB MWCF	LED		2,14	96631032	
AQFPRO L LED6400-840 PC MB MWCF	LED		2,14	96631034	
AQFPRO L LED8000-840 PC MB MWCF	LED		2,14	96631036	
Aquaforce Pro accessories					
HLD TW AQFPRO			0,1	96631102	
AQFPRO FIX/CH KIT			0,003	96631103	
AQFPRO MCA KIT			0,1	96631104	

Aquaforce Pro

Description	ILCOS Code	Socket	Wt (kg)	SAP Code	Cat. No.
DIFFUSER AQUAFORCE PRO S PC WB			1,3	96631121	
DIFFUSER AQUAFORCE PRO S PC MB			1,3	96631122	
DIFFUSER AQUAFORCE PRO L PC WB			1,912	96631123	
DIFFUSER AQUAFORCE PRO L PC MB			1,912	96631124	
HOUSING AQUAFORCE PRO S			0,936	96631125	
HOUSING AQUAFORCE PRO L			1,354	96631126	
MOUNTING SET AQUAFORCE PRO			0,3	96631127	
ZASP AMP/AQF PRO			0,103	22168741	