



Built to last

BUILT TO LAST

This robust and high-performance LED lantern brings comfort and safety to any road or street. Pressure to reduce energy costs and carbon emissions for outdoor lighting is stronger than ever. High-quality LED street lanterns offer a great solution, thanks to clever design, highly efficient light sources, long life and smart controls.



Motorways, high speed roads, major roads



Minor roads and residential roads



Intersections



Parking

DARKSKY ACCREDITATION



'DarkSky' is recognised as the global authority on light pollution and is the leading organisation combating this issue worldwide.

The DarkSky Approved seal is a highly regarded accreditation for manufacturers. The process to achieve this accreditation reviews key features and benefits of a luminaire, its fundamental design and deep dive analysis of photometric data to ensure the product meets strict requirements to limit light pollution.



ISARO PRO



READY TO CONNECT


Both sizes can be configured with a NEMA or Zhaga interface, Zhaga-D4i certified.

ZO

SMART LIGHTING

Isaro Pro incorporates many control solutions such as UrbaSens, our state-of-the-art intelligent outdoor lighting system: save energy, provide light only when and where it is required and control the whole system from a simple dashboard. Combine it with our expert service team, and you'll get revolutionary lighting without the risk.

BEST IN CLASS ROAD AND STREET OPTICS

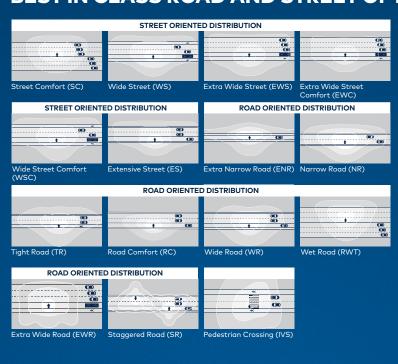



A FUTURE PROOF SOLUTION

Made of top-quality alloy, Isaro Pro is built to withstand all conditions, and to cope with physical impact and vibration. With a lifetime up to 100 000 hours, it guarantees years of reliable performance, ensuring a low-cost of ownership. And with connectivity built in, it's a truly futureproof solution. As well as being robust, this modern lantern is slim, sleek and performs brilliantly. With light output of up to 23 000 lm with 2 sizes, Isaro Pro is powerful

enough to handle roads and streets, residential areas, car parks and walking/cycling paths. Because every application is different, Isaro Pro uses Thorn's unique R-PEC optic to offer unprecedented optical flexibility. A choice of several precise light distributions is available for highly efficient and comfortable light, exactly where it is needed, whether lighting a residential street, a busy road or a pedestrian crossing.








IP66 IK09


BUILT TO LAST

Isaro Pro is built to withstand almost everything that nature and the outdoor environment can throw at it. With an IP66 rating for ingress protection and IK09 for impact, the luminaire also has strong corrosion resistance and vibration resistance. There are few applications Isaro Pro can't handle.



CORROSION RESISTANT

Thanks to the best in class alloy and the specific fixing system treatment, Isaro Pro has strong corrosion resistance and easliy reaches Category 5 (C5 – very high corrosivity) according to ISO 9223 – Corrosion of metal and alloys.



GREAT ROI POTENTIAL

Isaro Pro's long life (up to 100 000 h) and efficacy of up to 170 lm/W in addition to a wide choice of controls (radio frequency, daylight sensor and others) mean that overall cost of ownership is low, ensuring a quick ROI (Return of Investment) but also allowing operators to make significant long-term savings. The ability to easily add or replace internal components including the driver, LEDs and controls, means the luminaire is truly futureproof.

- Existing 70 W SON HID
 ISARO PRO 12LED WS
- ISARO PRO 12LED WS + Light management

IP	12L	70	740	NR	CLO	BP2350	HFX	SP	CL1	N7	T60F	W6	R9006	
Range	LED	mA	CCT/CRI	Optic	CLO	Diming	DALI	Fuse	Safety	Controls	Spigot	Wiring	Colour	
														optional
													RALxxx	Different RAL possibility
													optional	
												XX m		wire lengths from 3 to 16 m
												optional	ana airre	erent cable types
											L42E		ed 42 mm :	spigot lateral 0°
											L60E			spigot lateral 0°
											T60F	Pre-fitte	ed 60 mm	spigot post top +5°
											T76F			spigot post top +5°
											M42			-fitted for freedom of position
											M60 M76			-fitted for freedom of position
											optional	701111115	pigot non-	-fitted for freedom of position
										N3	'	NEMA pho	tocell soci	ket - 3 pin
										N7		NEMA pho		
										ZU/ZD/ZUD	Zhaga So	ocket Up, [Down, Up	& Down
										PM	-	Mini photo	cell	
									CL1 CL2	Class I elect	-		12	
									optional	Class II elect	tricai (aou	bie insulat	ea)	
								SP		lti pulse surge	e protectio	n		
								option		, ,				
									immable					
							option							
						BPL LRT		er Powe						
						BSxyzz	-		n Twin Ph	ases h different dir	mming pro	files		
						BPxyzz				dimming prof		illes		
						optional				51				
						Constant		utput						
			700			EC optics a	vailable							
			722 727	CRI 70 -										
			727	CRI 70 -										-
			740	CRI 70 -										
			757	CRI 70 -										
			830	CRI 80 -	3000 K									
			840	CRI 80 -										-
		ALO	Adjustable	lumen out	tput					*IDA	fixture se			SKY APPATON
		35 to	350 mA to	1050 ^								es to ≤ 300 ear enclosi		\{\bar{\sigma}(\bar{\bar{\bar{\bar{\bar{\bar{\bar{\bar
		105	33U MA TO	IUSU MA							, .	maximum		Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z Z
	12L									c	only. Lumir			Gertifled by DarkSky.org
	to	From 1 to 72 L								mo	unted as p	hotomete	ered.	
	72L	10 /2 L	LU3											10 kV as standa

10 kV as standard Up to 23 000 lm Up to 170 lm/W Up to 100 000 h L95 B10 @ Ta 25°C







IK09

IP66 -30°C

*High operating temperature available depending on lumen output

Accessories IK10 accessory

Back, front and side louvres

Material


Full die cast aluminium and flat glass

Standards









Configure the ideal product solution with myProduct. The myProduct configurator allows you to easily configure a luminaire according to your needs. **Try it now at** http://www.thornlighting.com/myproduct

Isaro Pro

