

IP40	IK03			650°C	T _a 5 35	
------	------	---	---	-------	------------------------	--

Versatile exit sign with low-maintenance LED option

A self-contained, maintained emergency exit sign for 1 x 1W Light Source: LED strip giving 3 hour SelfTest or Addressable Test if connected to Explorer Project/Vision, emergency operation. IP40, Class I electrical. Body in polycarbonate, finished metallic silver. Diffuser in polycarbonate. Can be wall mounted with 20mm conduit or rear back box entry. Legend panels required to be ordered separately in either ISO or EU formats. Complete with LED strip


Dimensions: 327 x 65 x 197 mm

Luminaire input power: 4 W

Weight: 1.4 kg



TLG_VSIG_F_WALL.jpg

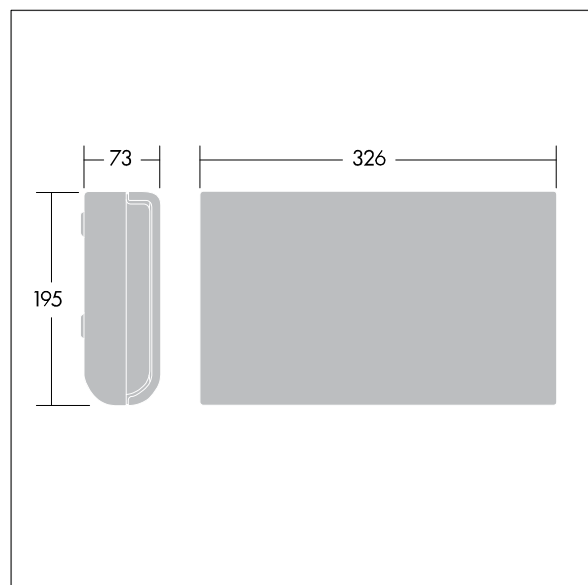

TLG_VYSG_M_LD1.wmf