



## Plurio

Decorative, post-top lantern with LED package with electronic driver. Class II electrical, IP66, IK08. Base in cast aluminium, powder coated silver-grey. Canopy in round shape, made from aluminium textured silver-grey (close to RAL9006). UV stabilised polycarbonate clear diffuser with anti-glare prisms. Internal wide street reflector. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Supplied complete in one box. Complete with 4000K LED

To be post top mounted on a spigot of Ø60mm, length 75mm. Pre-cabled with 4m HO5-W F 2 x 1.5mm<sup>2</sup> cable.

Dimensions: Ø564 x 564 mm

Luminaire input power: 39 W


Weight: 7.8 kg

Scx: 0.073m<sup>2</sup>

Luminaire efficacy: 113 lm/W



TLG\_PLRO\_F\_LEDSYMRND.jpg

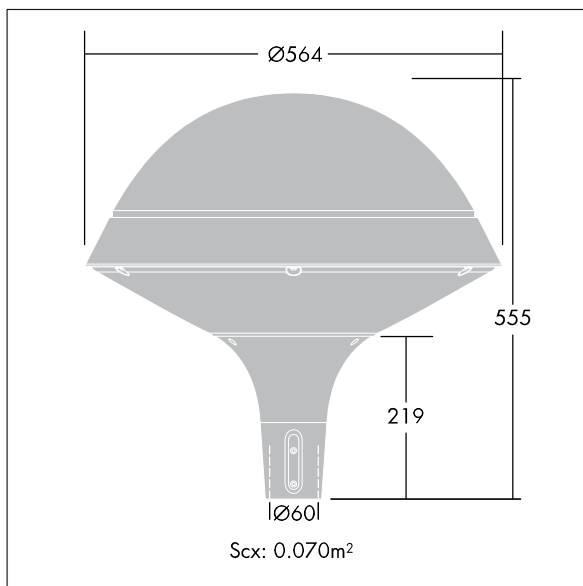

TLG\_PLRO\_M\_SPHRd60.wmf

This product contains a light source of energy efficiency class D.

**Plurio**

**E7753926 / 96260707 PLD R 18L70 WST BPSW CL2 N4M D60 L740**

**THORN**