

ISO 9223 C3		IP66 IK09				T <sub>a</sub> -20 +25
----------------	---	-----------	---	---	---	---------------------------

### FleXity

A modern, discreet and versatile post top LED lantern with a radially symmetric distribution. LED driver Programmable driving 24 LEDs at 250mA. Class II electrical, IP66, IK09. Canopy and base: die-cast aluminium (EN AC-46100) powder coated dark grey (close to RAL7043). Enclosure: polycarbonate diffuser. Complete with 4000K LED. Post top mounting to Ø60mm column, maximum spigot length 75mm. Pre-wired with 5m cable.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 370 x 430 x 290 mm

Luminaire input power: 20 W

Luminaire luminous flux: 2393 lm


Luminaire efficacy: 120 lm/W

Weight: 4.5 kg

Scx: 0.038 m<sup>2</sup>



TLG\_FLEX\_F\_D60SMPDB.jpg

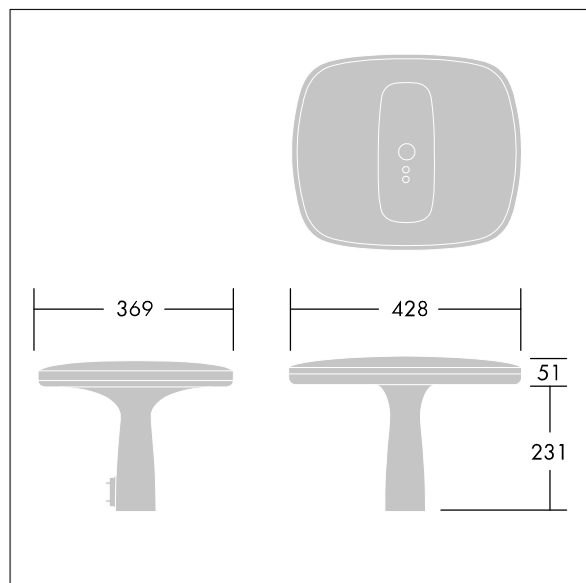

TLG\_FLEX\_M\_LD1.wmf

This product contains a light source of energy efficiency class D.