




Vioo

Small LED floodlight for window surround illumination. 1 LED driven at a constant 1.2A. Body: die-cast aluminium (AB47100) with high corrosion resistance, painted Light grey. Front lens: polycarbonate. Class I electrical, IP65, IK10. Pre-wired with 1,5m H05-RNF cable. Complete with 4000K LED

Dimensions: 150 x 90 x 40 mm
 Luminaire input power: 4.7 W
 Luminaire luminous flux: 200 lm
 Luminaire efficacy: 43 lm/W
 Weight: 0.71 kg



TLG_VIOO_F_PDB.jpg

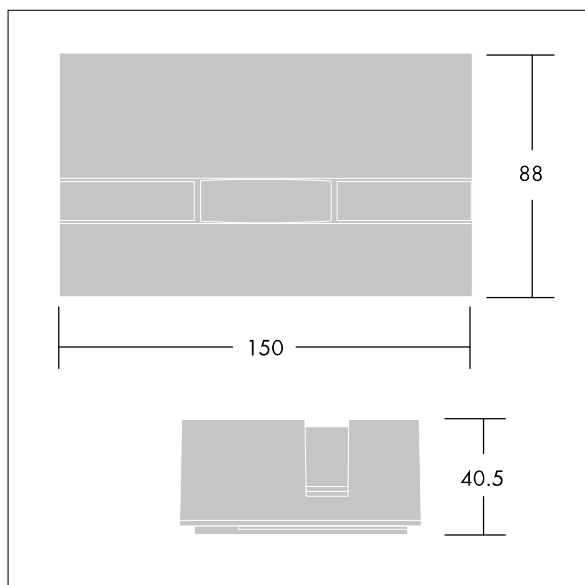

TLG_VIOO_M_LD1.wmf

This product contains a light source of energy efficiency class F.