96629594 <LYRIC BASE LED 2500-840 HF E3TX WH
+ 96004155 <LYRIC SHAPE CIRC SIL

IP40 | 850°C | T_a25

LED base for wall and ceiling luminaires, featuring "starburst" backlighting. Electronic, fixed output control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Body: white (close to RAL9016) die-cast aluminium. Complete with 4000K LED

Diffuser/bezel is required and should be ordered separately.

Dimensions: Ø456 x 107 mm
Luminaire input power: 25 W
Total luminous flux: 2500 lm
Weight: 2.8 kg

Equipped with:
Bezel and diffuser attachment for use with Lyric base wall and ceiling luminaires. Opal textured polycarbonate diffuser in a narrow bezel with circular aperture. Bezel finished silver.

Weight: 0.9 kg

TLG_LYRL_F_SIL.jpg

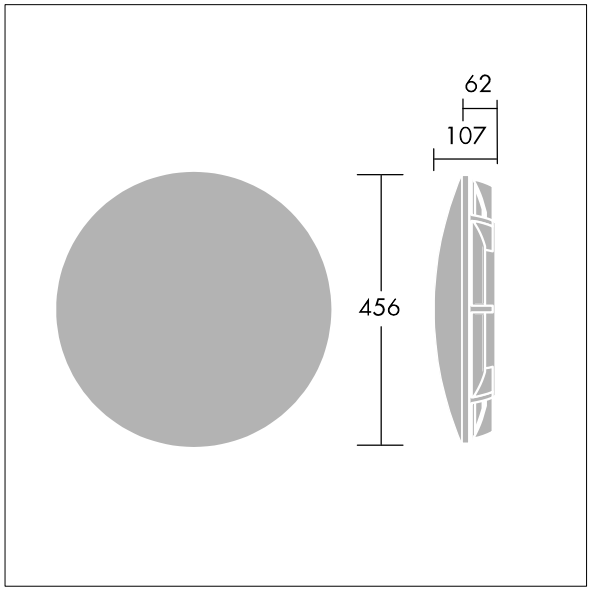

TLG_LYRL_M_LD1.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

THORN

96629594 <LYRIC BASE LED 2500-840 HF E3TX WH

+ 96004155 <LYRIC SHAPE CIRC SIL

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting