

Equaline Mini

96630774 EQUAMINI L580 LED950-830 SD


THORN

| | | | | | | | | |
|------|------|---|---|---|---|---|-------------------|--|
| IP20 | IK06 |  |  |  |  |  | T _a 35 | |
|------|------|---|---|---|---|---|-------------------|--|


Equaline Mini

A slim Surface mounted LED batten luminaire. Electronic, fixed output control gear. Class I electrical. IP20, IK06. Body: extruded aluminium anodised finish. Diffuser: opal polycarbonate plastic. End-cap: Dual-colour injected polycarbonate plastic. Electrical connection via end-cap feed in (SD). Continuous linking possible. Complete with 3000K LED

Dimensions: 580 x 37 x 60 mm
Luminaire input power: 9.2 W
Luminaire luminous flux: 1053 lm
Luminaire efficacy: 114 lm/W
Weight: 0.65 kg

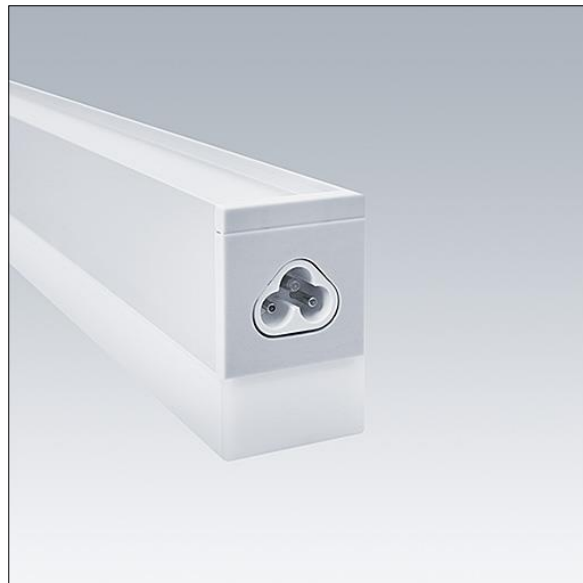

TLG_EQUM_F_SS.jpg

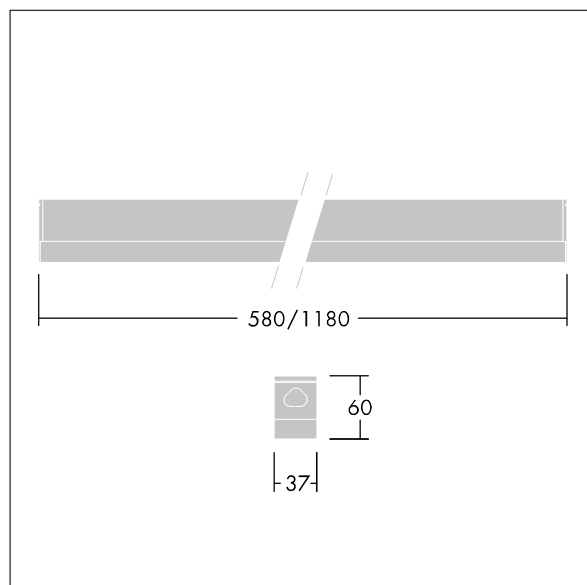

TLG_EQUM_M_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Equaline Mini

96630774 EQUAMINI L580 LED950-830 SD

THORN