

	IP20 IP44	IK03					650°C	T <sub>a</sub> -20 +25
---	--------------	------	---	---	---	---	-------	---------------------------

### IQ Wave


Recessed modular, direct LED luminaire. Electronic, dimmable control gear, Wireless connection via app with Bluetooth® 4.x - basicDIM Wireless , (installation in metal ceilings not allowed). Luminaire arrangement: Mobile control to luminaire max. 15 m, luminaire to luminaire max. 4 m (centre). Class I electrical, IP44\_IP20, IK03. Body: highly reflective steel. Frame and end caps: polycarbonate. Diffuser: polycarbonate with aluminium heatsink. Gear tray: powder coated white steel. Suitable for lay in or pull up (with accessory) installation. Complete with 4000K LED

Radio definition: basicDIM Wireless - Bluetooth® 4.x,  
Radio frequency: 2.4...2.483 GHz, Radio power: +4 dBm.

Dimensions: 597 x 597 x 97 mm  
Luminaire input power: 40 W  
Luminaire luminous flux: 4250 lm  
Luminaire efficacy: 106 lm/W  
Weight: 3.8 kg



TLG\_IQWV\_F\_PDBCEILING.jpg

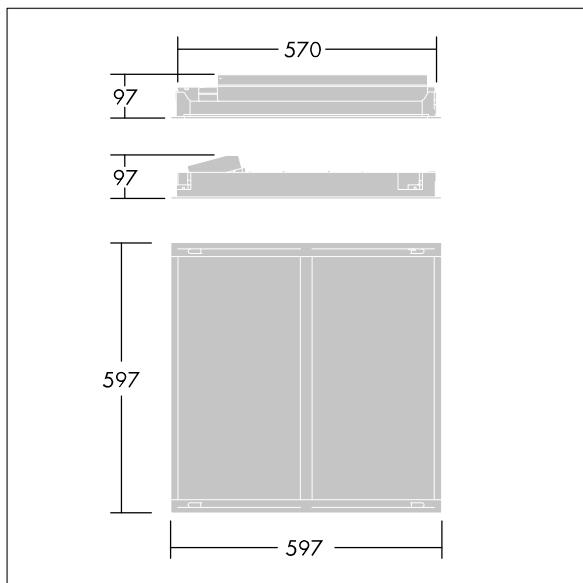

TLG\_IQWV\_M\_600.wmf

This product contains a light source of energy efficiency class D.

**IQ Wave**

**E7077577 / 96631044 IQ WAVE LED4100-840 BC Q597 MRE**

**THORN**