

96631540 POPPACK LED 3000-840 HFI L1200

| | | | | | | | | |
|------|------|---|---|---|---|-------|---------------------------|--|
| IP20 | IK03 |  |  |  |  | 650°C | T _a -20 +25 | |
|------|------|---|---|---|---|-------|---------------------------|--|


PopPack

Batten LED luminaire. Electronic, DALI dimmable control gear. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate,. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm² terminal block. Complete with 4000K LED

Dimensions: 1168 x 60 x 74 mm
 Luminaire input power: 23.9 W
 Luminaire luminous flux: 3350 lm
 Luminaire efficacy: 140 lm/W
 Weight: 1.4 kg



TLG_POPL_F_PDB_EMPTY.jpg

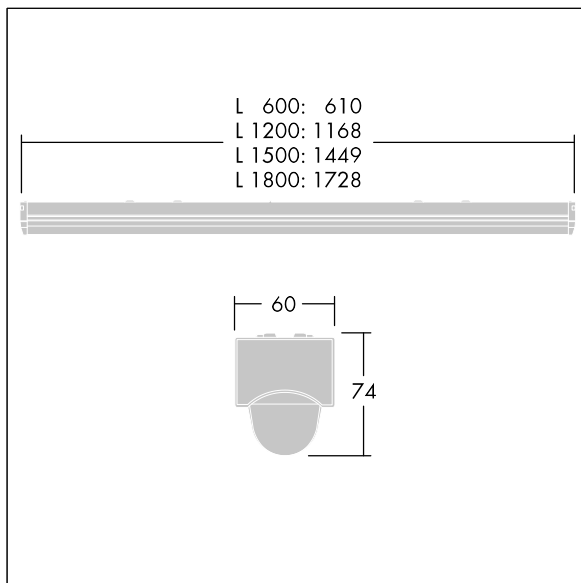

TLG_POPL_M_LD1.wmf

This product contains a light source of energy efficiency class D.