

## 96631547 POPPACK LED 7000-840 HF E3 L1200

IP20	IK03					650°C	T <sub>a</sub> 0 +25	
------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-------	-------------------------	--


### PopPack

Batten LED luminaire. Electronic, fixed output control gear with 3 hour, manual test, emergency lighting circuit. Body: coated, formed steel, white (RAL9016). End caps: injection moulded polycarbonate, white. Diffuser: textured opal acrylic. Electrical connection via (3 + 3) x 2 x 2.5mm<sup>2</sup> terminal block. Complete with 4000K LED

Dimensions: 1168 x 60 x 74 mm  
 Luminaire input power: 51.8 W  
 Luminaire luminous flux: 7300 lm  
 Luminaire efficacy: 141 lm/W  
 Weight: 2 kg



TLG\_POPL\_F\_PDB\_EMPTY.jpg

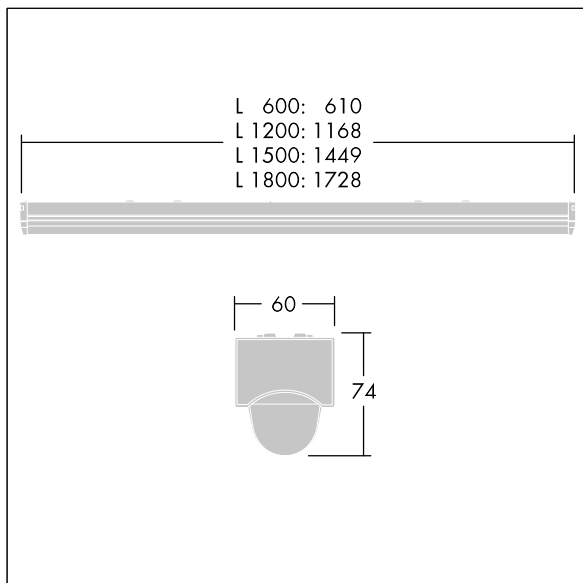

TLG\_POPL\_M\_LD1.wmf

This product contains a light source of energy efficiency class D.

**PopPack**

**96631547 POPPACK LED 7000-840 HF E3 L1200**

**THORN**