



Equaline


Equaline slim frame (FS) channel with optics for 2nd generation Equaline. Body: silver powder coated aluminium, suitable for plasterboard installation. For single and continuous installation. Continuous run with visible joints between optic pieces. Optics: Luminance reducing optic (LRO) with $UGR < 19$ made of PMMA. Batten, end cap set and installation accessories to be ordered separately. Luminaire wired with halogen free leads.

Equaline consists of a channel, LED-batten, cover and accessories, which have to be configured and ordered separately. This product is one part of the complete configuration.

Dimensions: 1250 x 82 x 88 mm
Weight: 2.6 kg



TLG_EQUL_F_C_MPO_Channel_CFSSR.jpg

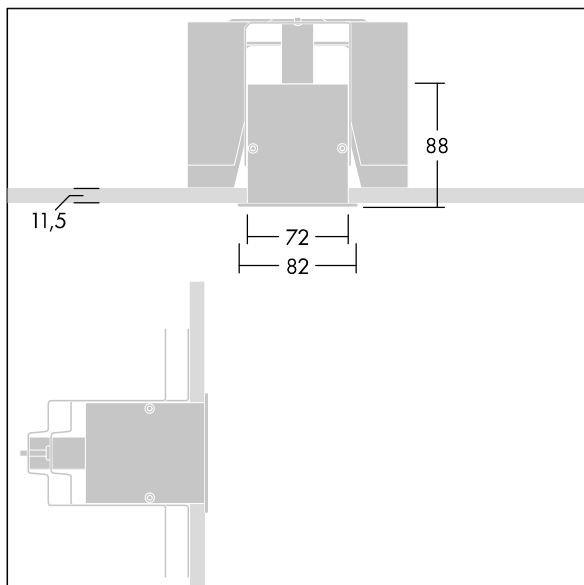

TLG_EQUL_M_plasterboard_niv_6mm.wmf

Equaline

96632042 EQL C L1250 LRO SRE FS

THORN