

# IQ Wave SP

THORN


92907855 IQ SURF L LED6700-840 HF E3TX-B WH

IP40	IK05					650°C	T <sub>a</sub> -20 +25
------	------	--	--	--	--	-------	---------------------------


## IQ Wave SP

A lightweight, Surface mounted, LED luminaire with MV Tech optic. Electronic, fixed output control gear with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP40, IK05. Body, diffuser, frame and endcaps: polycarbonate finished in white (close to RAL9016). Gear tray: pre-coated white steel. Cable entry only possible via BESA mounting hole. Complete with 4000K LED

Dimensions: 1440 x 210 x 70 mm  
Luminaire input power: 61 W  
Luminaire luminous flux: 6700 lm  
Luminaire efficacy: 110 lm/W  
weight: 4.6 kg

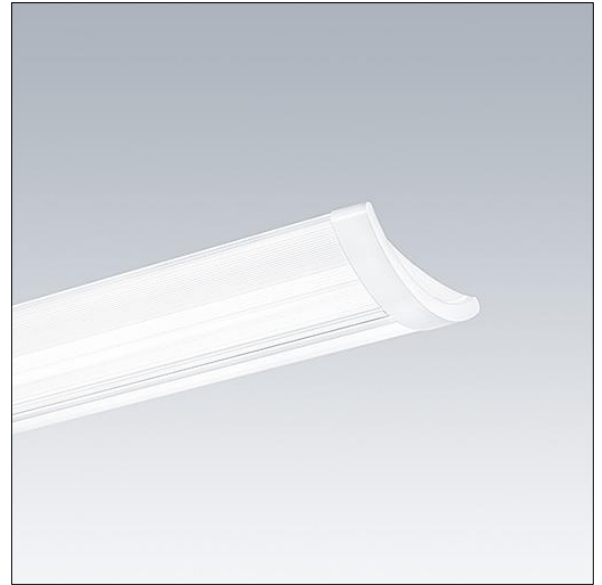

TLG\_IQSU\_F\_SUP\_PDB.jpg

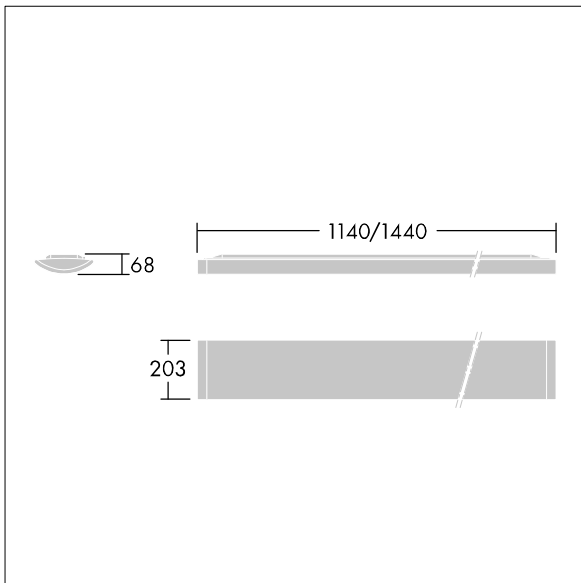

TLG\_IQSU\_M\_SUR.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# **IQ Wave SP**

**92907855 IQ SURF L LED6700-840 HF E3TX-B WH**

**THORN**