

96633050 DUROLIGHT-R 5300-840 HF L1550

| | | | | | | | | | |
|------|------|--|--|--|--|-------|--|-------|---------------------------|
| IP65 | IK10 | | | | | 850°C | | 170Nm | T _a -25 +50 |
|------|------|--|--|--|--|-------|--|-------|---------------------------|


Durolight

Anti-vandal Recessed LED luminaire. Electronic, fixed output control gear. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 4000K LED

Dimensions: 1525 x 300 x 115 mm
 Luminaire input power: 46.7 W
 Luminaire luminous flux: 5246 lm
 Luminaire efficacy: 112 lm/W
 Weight: 17 kg



TLG_DURO_F_MRE.jpg

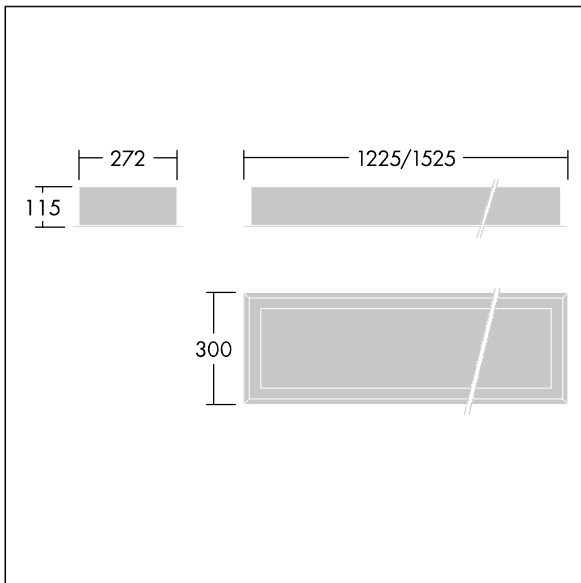

TLG_DURO_M_LDR.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.