

## 96633063 DUROLIGHT-S 4000-830 HF L1350

|      |      |  |  |  |  |       |  |                           |
|------|------|--|--|--|--|-------|--|---------------------------|
| IP65 | IK10 |  |  |  |  | 850°C |  | T <sub>a</sub> -25<br>+50 |
|------|------|--|--|--|--|-------|--|---------------------------|


### Durolight

Anti-vandal Surface mounted LED luminaire. Electronic, fixed output control gear. IP65, IK10, Class I electrical. Body: 2mm sheet steel painted white (close to RAL9016). Gasket: non-ageing polyurethane foam. Diffuser: 3mm thick polycarbonate with outstanding impact resistance, connected and secured with tamper-resistant stainless steel twin hole screws to the body. Complete with 3000K LED

Dimensions: 1350 x 290 x 66 mm  
Luminaire input power: 37.6 W  
Luminaire luminous flux: 3965 lm  
Luminaire efficacy: 105 lm/W  
Weight: 15 kg



TLG\_DURO\_F\_MCE.jpg

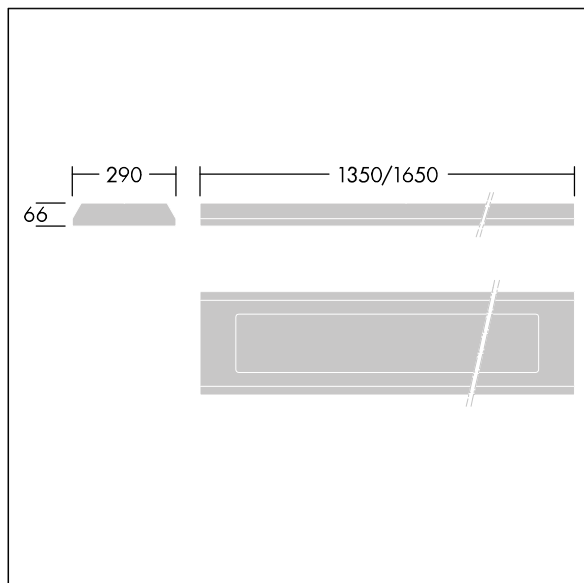

TLG\_DURO\_M\_LDS.wmf

This product contains a light source of energy efficiency class C.

**Durolight**

**96633063 DUROLIGHT-S 4000-830 HF L1350**

**THORN**