

ISO 9223 C5	PLUG X 11 *	ida DAK-SKY APPROVED		IP66	IK08		CE			T _a 25	
----------------	----------------	-------------------------	--	------	------	--	----	--	--	-------------------	--

Plurio


Plurio Indirect: A decorative post-top LED lantern with Extra Wide Comfort - Backlight distribution. LED driver with 24 LEDs driven at 350mA. Class II electrical, IP66, IK08. Base: cast aluminium, powder coated light grey 150 (close to RAL9006). Canopy: flat shape, aluminium, textured light grey 150 (close to RAL9006). Diffuser: UV stabilised, clear polycarbonate with anti-glare prisms. Indirect, reflector based optic. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Complete with 3000K LED. Post top mounting to Ø60mm column. Pre-wired with 4m cable.

Upward lighting emissions below 1%.

Dimensions: Ø601 x 487 mm
 Luminaire input power: 26 W
 Luminaire luminous flux: 2724 lm
 Luminaire efficacy: 105 lm/W
 Weight: 6.7 kg
 Scx: 0.167 m²



TLG_PLRL_F_IFC_ANT.jpg

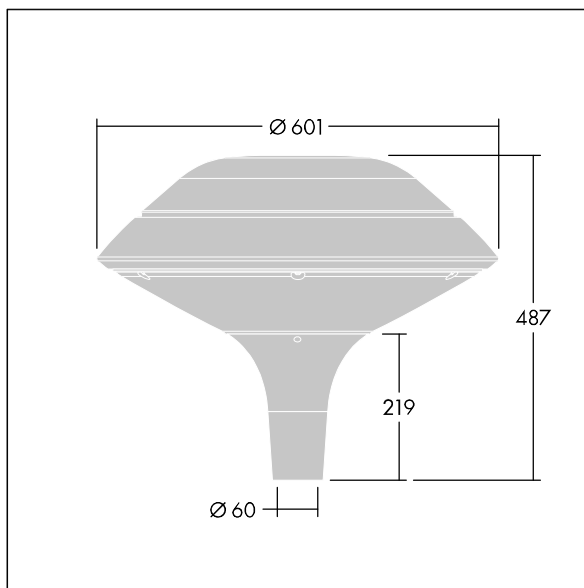

TLG_PLRL_M_IFC_T60.wmf

This product contains a light source of energy efficiency class D.