

# Diffusalux

# THORN

96633571 DIFF 3 5000-840 HFIX E3 L1500 LOS

IP40	IK06					650°C	T <sub>a</sub> 25
------	------	--	--	--	--	-------	-------------------


## Diffusalux

A surface mounted, LED luminaire. DALI dimmable LED driver with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP40. Body: painted steel. End caps: polycarbonate with a curved, extruded opal polycarbonate diffuser. Ø21.5mm cable entry hole in the centre of the back spine. Standard BESA fixings at 600mm centres. Piano key terminal block. Complete with 4000K LED. Lumen output can be selected by internal link/switch. HF versions can select the following: 3050lm (LO) / 4750lm (ME) / 6300lm (HI). HFIX versions can select the following: 3250lm (LO) / 5500lm (ME). Default setting is Medium mode. For exact photometric and power information – please visit website and select drop down with LO / ME / HI modes.

Dimensions: 1490 x 200 x 81 mm  
Weight: 2.9 kg



TLG\_DFX3\_F\_PDB.jpg

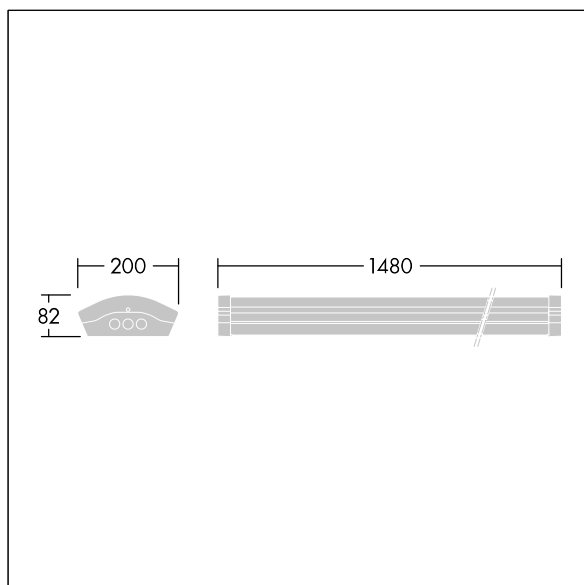

TLG\_DFX3\_M\_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Diffusalux

96633571 DIFF 3 5000-840 HFIX E3 L1500 LOS

THORN