

Beta 3

E7019990 / 96634489 BETA 3 4800-840 HF LRO Q600

| | | | | | | | | | |
|---------------------------|------------------|------|--|--|--|--|--|--------|---------------------------|
| IEC EN 60598-1 RG 0 | ↓ IP20 ↑ IP44 | IK03 | | | | | | 650 °C | T _a -20 +40 |
|---------------------------|------------------|------|--|--|--|--|--|--------|---------------------------|

Beta 3


A square ceiling recessed LED luminaire. Fixed output LED driver. Class II electrical, IP44_IP20, Impact strength: IK03. Body: sheet steel, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 4000K LED.

UGR < 19 and L65 < 3000 cd/m² as per EN 12464

Dimensions: 596 x 596 x 34 mm
Luminaire input power: 39.2 W
Luminaire luminous flux: 4800 lm
Luminaire efficacy: 122 lm/W
Weight: 2 kg



TLG_BET3_F_MREQ.jpg

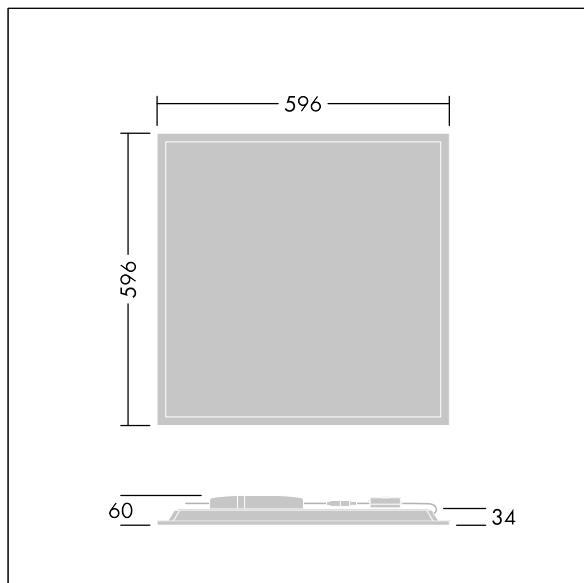

TLG_BET3_M_Q600.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Beta 3

E7019990 / 96634489 BETA 3 4800-840 HF LRO Q600

THORN