

E7740023 / 92927541 PLD D 18L50 740 R/S BS 3550 T60 CL2 ->

ISO 9223 C5			IP66	IK08					Ta25	
----------------	--	--	------	------	--	--	--	--	------	--

## Plurio


Plurio Direct: A decorative post-top LED lantern with radially symmetric distribution. LED driver with 18 LEDs driven at 500mA. Class II electrical, IP66, IK08. Base: cast aluminium, powder coated silver-grey. Canopy: disc shape, aluminium, textured silver-grey. Diffuser: UV stabilised, clear polycarbonate with anti-glare prisms. Direct, lens based optic with internal reflector. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Complete with 4000K LED. Post top mounting to Ø60mm column. Pre-wired with 4m cable.

Upward lighting emissions below 1%.

Dimensions: Ø618 x 453 mm  
 Luminaire input power: 28 W  
 Luminaire luminous flux: 3538 lm  
 Luminaire efficacy: 126 lm/W  
 Weight: 7.7 kg  
 Scx: 0.151 m<sup>2</sup>



TLG\_PLRL\_F\_DDC\_GY.jpg

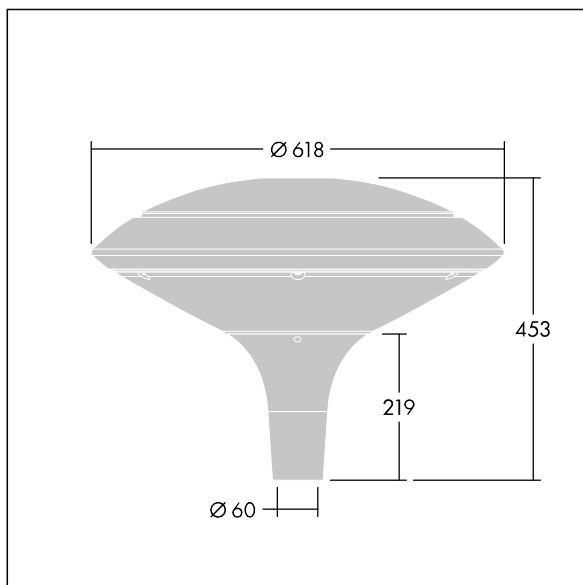

TLG\_PLRL\_M\_DDC\_T60.wmf

This product contains a light source of energy efficiency class D.

**Plurio**

**THORN**

**E7740023 / 92927541 PLD D 18L50 740 R/S BS 3550 T60 CL2 ->**