

## Beta 3

THORN

96635084 BETA 3 4100-840 HFIX E3 LRO 3X12 WL6BU

IEC EN 60598-1 RG 0	↓ IP20 ↑ IP44	IK03		CE				650 °C	T <sub>a</sub> -20 +40	
---------------------------	------------------	------	--	----	--	--	--	--------	---------------------------	--

### Beta 3

A rectangular ceiling recessed LED luminaire. DALI dimmable LED driver with 3 hour, manual test, emergency lighting circuit. Class II electrical, IP44 IP20, Impact strength: IK03. Body: sheet steel, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. 6 pole Wieland connector black/blue Supplied with safety wire. Complete with 4000K LED.

UGR < 19 and L65 < 3000 cd/m<sup>2</sup> as per EN 12464

Dimensions: 1196 x 296 x 34 mm

Luminaire input power: 33.6 W


Luminaire luminous flux: 4100 lm

Luminaire efficacy: 122 lm/W

Weight: 4.66 kg



TLG\_BET3\_F\_MRER.jpg

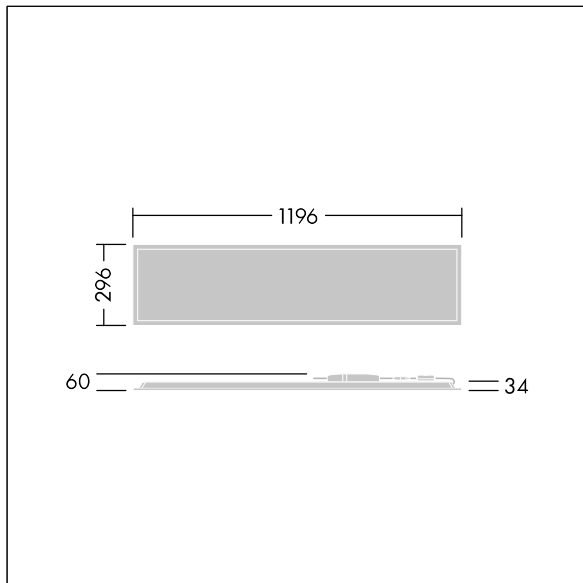

TLG\_BET3\_M\_3X12.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Beta 3**

**96635084 BETA 3 4100-840 HFIX E3 LRO 3X12 WL6BU**

THORN