

IQ Beam

96635098 IQ BEAM 3000-830 MPT HFIX Q600 TBL5

| | | | | | | | | | |
|---------------------------|--|------|------|--|--|--|--|--------|---------------------------|
| IEC EN 60598-1 RG 1 | | IP20 | IK03 | | | | | 650 °C | T _a -20 +40 |
|---------------------------|--|------|------|--|--|--|--|--------|---------------------------|


IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. DALI-2 dimmable, LED driver. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic. Suitable for lay-in installation, pull up installation optional. Luminaire with internal connecting terminal, compatible with LINECT® outside connection Complete with 3000K LED.

Dimensions: 597 x 597 x 60 mm
 Luminaire input power: 24.7 W
 Luminaire luminous flux: 3050 lm
 Luminaire efficacy: 123 lm/W
 Weight: 4.16 kg



TLG_IQBM_F_pers_B.jpg

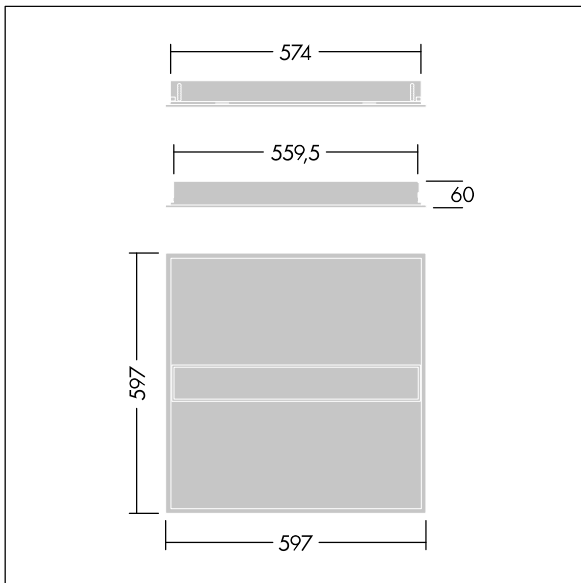

TLG_IQBM_M_LDQN.wmf

This product contains a light source of energy efficiency class C.

IQ Beam

96635098 IQ BEAM 3000-830 MPT HFIX Q600 TBL5

THORN