

# IQ Beam

THORN

## 96635106 IQ BEAM 3800-930 MPT-F HFIX Q600 TBL5

IEC EN 60598-1 RG 1		IP20	IK03					650 °C	T <sub>a</sub> -20 +40	
---------------------------	-----------------------------------------------------------------------------------	------	------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	-----------------------------------------------------------------------------------	--------	---------------------------	--


### IQ Beam

A linear optic, recessed modular LED luminaire for exposed T, plasterboard and concealed grid ceilings. DALI-2 dimmable, LED driver. Class I electrical, IP20, Impact strength: IK03. Body: white painted steel. Diffuser: micro prism structure acrylic with diffusing foil. Suitable for lay-in installation, pull up installation optional. Luminaire with internal connecting terminal, compatible with LINECT® outside connection Complete with 3000K LED.

Dimensions: 597 x 597 x 60 mm  
Luminaire input power: 35.2 W  
Luminaire luminous flux: 3800 lm  
Luminaire efficacy: 108 lm/W  
Weight: 4.18 kg



TLG\_IQBM\_F\_pers\_B.jpg

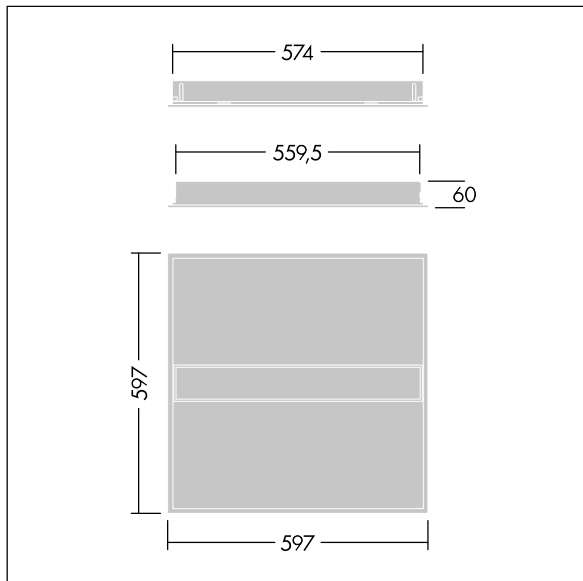

TLG\_IQBM\_M\_LDQN.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting