


IEC EN 60598-1 RG 0	↓ IP20 ↑ IP44	IK03		CE				650 °C	T <sub>a</sub> -20 +40	
---------------------------	------------------	------	--	----	--	--	--	--------	---------------------------	--

## Beta 3


A square ceiling recessed LED luminaire. DALI dimmable LED driver. Class II electrical, IP44\_IP20, Impact strength: IK03. Body: sheet steel, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 3000K LED.

UGR < 19 and L65 < 3000 cd/m<sup>2</sup> as per EN 12464

Dimensions: 596 x 596 x 34 mm  
 Luminaire input power: 39.2 W  
 Luminaire luminous flux: 4320 lm  
 Luminaire efficacy: 110 lm/W  
 Weight: 2.11 kg

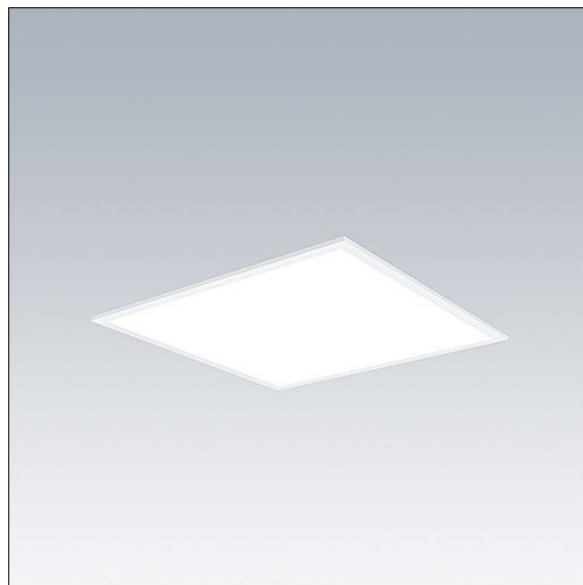

TLG\_BET3\_F\_MREQ.jpg

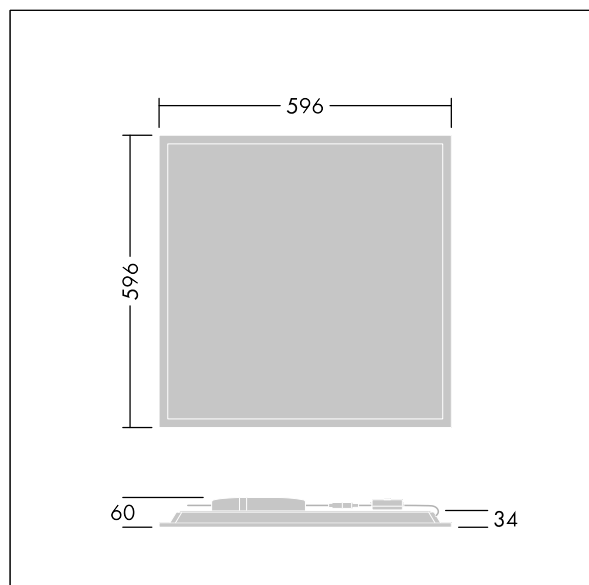

TLG\_BET3\_M\_Q600.wmf

**Beta 3**

**E7019566 / 92935085 BETA 3 4800-830 HFIX LRO Q600**

THORN