

Beta 3

THORN

92937909 BETA 3 4800-840 HFIX E3 LRO 3X12

IEC EN 60598-1 RG 0	↓ IP20 ↑ IP44	IK03		CE				650 °C	T _a -20 +40	
---------------------------	------------------	------	--	----	--	--	--	--------	---------------------------	--

Beta 3

A rectangular ceiling recessed LED luminaire. DALI dimmable LED driver with 3 hour, manual test, emergency lighting circuit. Class II electrical, IP44 IP20, Impact strength: IK03. Body: sheet steel, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 4000K LED.

UGR < 19 and L65 < 3000 cd/m² as per EN 12464

Dimensions: 1196 x 296 x 34 mm

Luminaire input power: 39.2 W


Luminaire luminous flux: 4800 lm

Luminaire efficacy: 122 lm/W

Weight: 3.6 kg



TLG_BET3_F_MRER.jpg

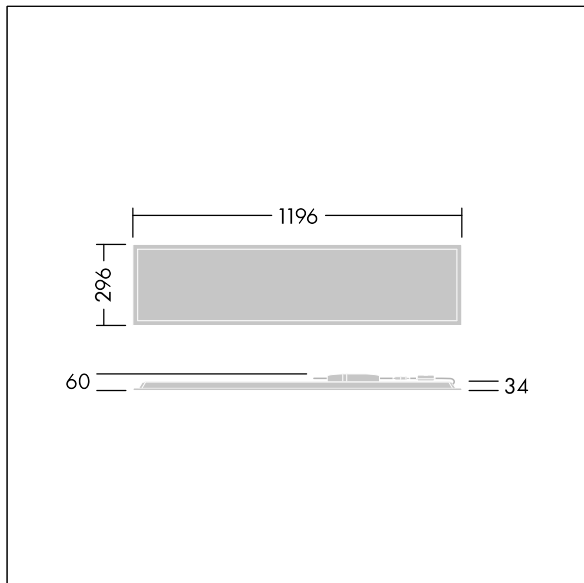

TLG_BET3_M_3X12.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Beta 3

92937909 BETA 3 4800-840 HFIX E3 LRO 3X12

THORN