

# Beta 3

## 92937911 BETA 3 4800-830 HF E3 LRO 3X12

|                           |  |                      |      |  |  |  |  |       |                         |
|---------------------------|--|----------------------|------|--|--|--|--|-------|-------------------------|
| IEC EN<br>60598-1<br>RG 0 |  | <br>↓ IP20<br>↑ IP44 | IK03 |  |  |  |  | 650°C | T <sub>a</sub> 0<br>+25 |
|---------------------------|--|----------------------|------|--|--|--|--|-------|-------------------------|

### Beta 3

A rectangular ceiling recessed LED luminaire. Fixed output LED driver with 3 hour, manual test, emergency lighting circuit. Class I electrical, IP44\_IP20, Impact strength: IK03. Body: sheet steel, white (close to RAL9016). Diffuser: Opalised PMMA with micro-prismatic foil inlay. Supplied with safety wire. Complete with 3000K LED.

UGR < 19 and L65 < 3000 cd/m<sup>2</sup> as per EN 12464

Dimensions: 1196 x 296 x 34 mm

Luminaire input power: 39.2 W


Luminaire luminous flux: 4320 lm

Luminaire efficacy: 110 lm/W

Weight: 3.6 kg



TLG\_BET3\_F\_MRER.jpg

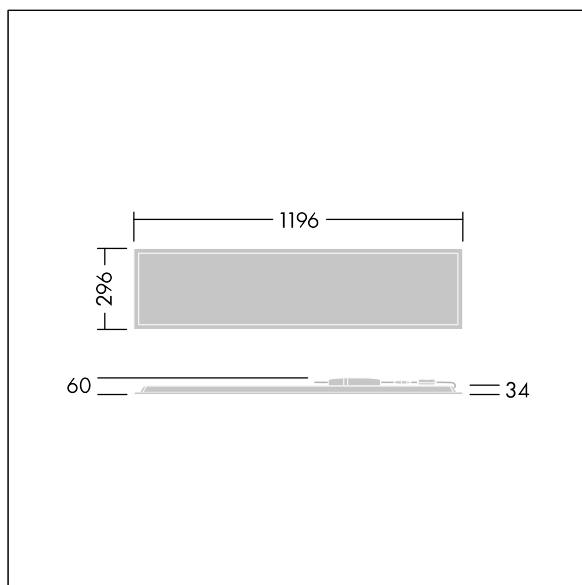

TLG\_BET3\_M\_3X12.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Beta 3**

**92937911 BETA 3 4800-830 HF E3 LRO 3X12**

**THORN**