

**E7728390 / 92938807 IS S 24L70 740 NR ZU CL2 WS8 T60F GY-S**

ISO 9223 C5	UK CA	IP66	IK08		CE			Ta45	
----------------	----------	------	------	--	----	--	--	------	--

## Isaro

A discrete and flexible road and street lantern with durable high performance. Programmable LED driver, set for fixed output, driving 24 LEDs at 700mA. Body: small size, die-cast aluminium (EN AC-44300), powder coated textured light grey 150 (close to RAL9006). Shaft: unpainted. Cover: Extra White glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70, Correlated colour temperature\*: 4000 Kelvin LEDs supplied. Class II electrical, Impact strength: IK08, IP66, Ta max.: 45°C. Supplied with Ø60mm spigot adaptor pre-fitted for post-top, 5° tilt. Pre-wired with 8m, 1.5mm² H07RN-F cable. Equipped with 1 Zhaga socket.

Dimensions: 550 x 238 x 157 mm

Luminaire input power: 51.5 W

Luminaire luminous flux: 7847 lm


Luminaire efficacy: 152 lm/W

Weight: 4.48 kg

Scx: 0.041 m²



TLG\_ISLC\_F\_S\_ZU\_SR.jpg

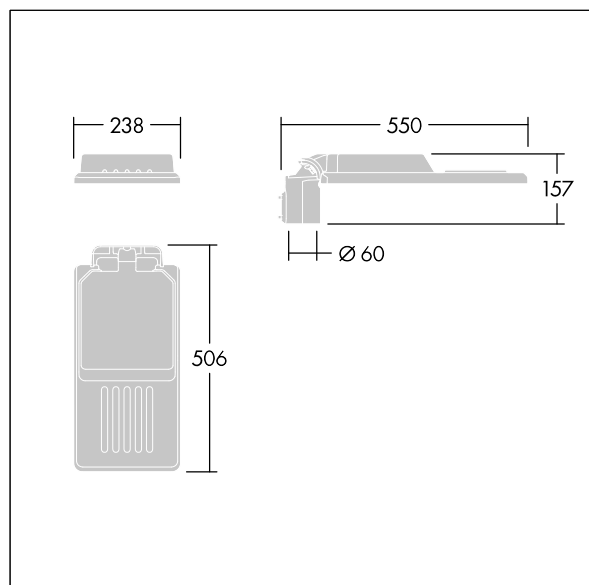

TLG\_ISLC\_M\_SMTP60.wmf

**Isaro**

**E7728390 / 92938807 IS S 24L70 740 NR ZU CL2 WS8 T60F GY-S**

**THORN**