

96635448 TR 12L25-740 NR CL2 FD T60E ANT

| | | | | | | |
|----------------|---|-----------|---|---|---|-------------------|
| ISO 9223 C5 |  | IP66 IK10 |  |  |  | T _a 25 |
|----------------|---|-----------|---|---|---|-------------------|


Thor

A small size, smart urban LED lantern with 12 LEDs driven at 250mA with narrow road optic and die-cast aluminium EN AC 47100 + CAT dome with anthracite finish (close to RAL7043). Class II electrical, IP66, IK10. Body: die-cast aluminium (EN AC 47100 + CAT) treated against corrosion, powder coated anthracite (close to RAL7043), bracket: die-cast aluminium (EN AC-47100 + CAT) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 6mm toughened flat glass. Screws and closing set: stainless steel. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Complete with 4000K LED.

Dimensions: 618 x 459 x 251 mm
 Luminaire input power: 12 W
 Luminaire luminous flux: 1532 lm
 Luminaire efficacy: 128 lm/W
 Weight: 8.65 kg
 Scx: 0.038 m²



TLG_THOR_F_SMTFPD.jpg

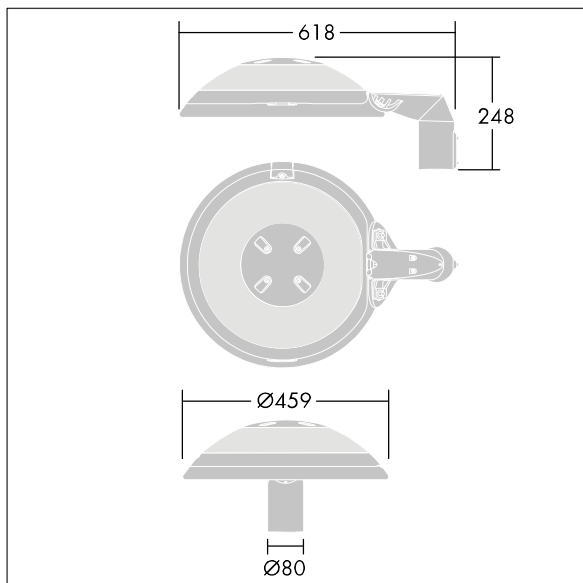

TLG_THOR_M_MTP O.wmf

This product contains a light source of energy efficiency class D.

Thor

96635448 TR 12L25-740 NR CL2 FD T60E ANT

THORN