

92945459 IS S 36L70-730 NR M CLO BP3550 ZU CL2 ->

ISO 9223 C5			IP66	IK08					650°C	T _a -35 +45
----------------	--	--	------	------	--	--	--	--	-------	---------------------------


Isaro

A discrete and flexible road and street lantern with durable high performance. Programmable LED driver, set for constant light output, driving 36 LEDs at 700mA. Body: small size, Die-cast aluminium (EN AC-44300), powder coated textured light grey 150 (close to RAL9006). Shaft: light grey 150 (close to RAL9006). Cover: Extra White glass. Fixings: stainless steel with anti-galvanic treatment. Narrow Road optic, with Colour Rendering Index min.: 70, Correlated colour temperature: 3000 Kelvin LEDs supplied. Class II electrical, Impact strength: IK08, IP66, Ta max.: 45°C. Supplied with Ø60mm spigot adaptor pre-fitted for post-top, 5° tilt. Pre-wired with 10m, 1.5mm² H07RN-F cable. Fitted with LED optic lining. BPxyzz: Autonomous bi-power reduction (x: hours before midnight, y: hours after midnight, zz: reduction (%)) equipped with Zhaga socket up.

Dimensions: 550 x 238 x 157 mm
Luminaire input power: 75.5 W
Luminaire luminous flux: 11537 lm
Luminaire efficacy: 153 lm/W
Weight: 5.09 kg
Scx: 0.041 m²



TLG_ISLC_F_S_ZU_SR.jpg

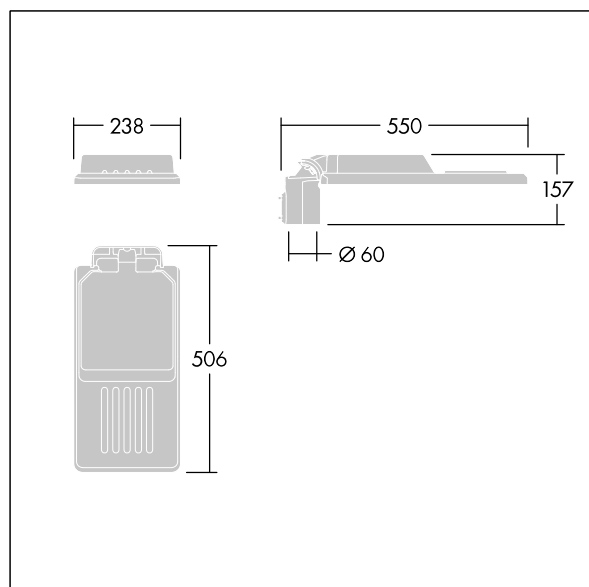

TLG_ISLC_M_SMTP60.wmf

This product contains a light source of energy efficiency class D.

Isaro

THORN

92945459 IS S 36L70-730 NR M CLO BP3550 ZU CL2 ->