

92945461 IS XS 12L70 730 ENR M CLO ZU CL2 WS3 ->

ISO 9223 C5			IP66	IK08					650°C	T _a -35 +45	
----------------	--	--	------	------	--	--	--	--	-------	---------------------------	--


Isaro

A discrete and flexible road and street lantern with durable high performance. Programmable LED driver, set for constant light output, driving 12 LEDs at 700mA. Body: extra small size, die-cast aluminium (EN AC-44300), powder coated textured light grey 150 (close to RAL9006). Shaft: light grey 150 (close to RAL9006). Cover: Extra White glass. Fixings: stainless steel with anti-galvanic treatment. Extra Narrow Road optic, with Colour Rendering Index min.: 70, Correlated colour temperature*: 3000 Kelvin LEDs supplied. Class II electrical, Impact strength: IK08, IP66, Ta max.: 45°C. Supplied with Ø42mm spigot adaptor pre-fitted for side-entry, 0° tilt. Pre-wired with 3m, 1.5mm² H07RN-F cable. Fitted with LED optic lining. Equipped with Zhaga socket up.

Dimensions: 563 x 180 x 84 mm
 Luminaire input power: 26.6 W
 Luminaire luminous flux: 3818 lm
 Luminaire efficacy: 144 lm/W
 Weight: 3.24 kg
 Scx: 0.028 m²



TLG_ISLC_F_XS_ZU_SR.jpg

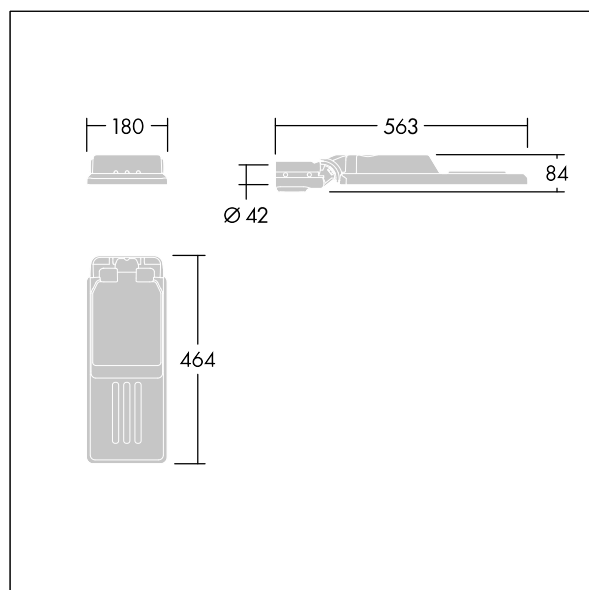

TLG_ISLC_M_XSMLE42.wmf

This product contains a light source of energy efficiency class D.