

## 92946649 CETUS3 S 800-830 HFIX RSB

|                           |          |    |              |         |      |    |       |                           |  |
|---------------------------|----------|----|--------------|---------|------|----|-------|---------------------------|--|
| IEC EN<br>60598-1<br>RG 1 | UK<br>CA | 11 | IP20<br>IP44 | halogen | IK06 | CE | 850°C | T <sub>a</sub> -20<br>+25 |  |
|---------------------------|----------|----|--------------|---------|------|----|-------|---------------------------|--|


## Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø95-125 mm for easy refurbishments or fast initial installations. Remote, pluggable, DALI dimmable LED driver with DC functionality, adjustable 15-100%, NFC configurable, SwitchDIM compatible. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44\_IP20. Spring clips suitable for ceiling thicknesses from 1 to 25 mm. Complete with 3000K LED

Luminaire input power: 7.5 W  
Luminaire luminous flux: 748 lm  
Luminaire efficacy: 100 lm/W  
Weight: 0.44 kg



TLG\_CTU3\_F\_S\_LED\_RSB\_Persp.jpg

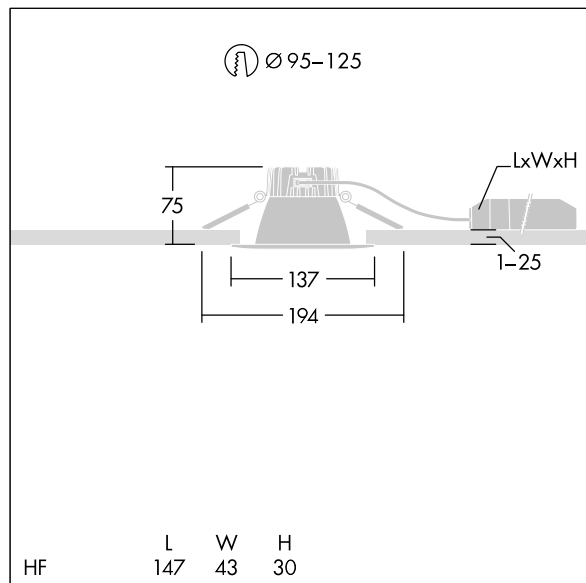

TLG\_CTU3\_M\_HFS.wmf

This product contains a light source of energy efficiency class D.

**Cetus**

**92946649 CETUS3 S 800-830 HFIX RSB**

THORN