

92946819 CETUS3 MSF 3000-830 HFIX RSB

IEC EN 60598-1 RG 1	UK CA	IP43	halogen	IK06	⊕	CE	⚡	850°C	T _a -20 +25	
---------------------	-------	------	---------	------	---	----	---	-------	------------------------	--


Cetus

Surface mounted LED downlight. DALI dimmable LED driver SwitchDIM compatible. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 3000K LED

Dimensions: Ø181 x 182 mm
 Luminaire input power: 25.4 W
 Luminaire luminous flux: 3023 lm
 Luminaire efficacy: 119 lm/W
 Weight: 2.71 kg



TLG_CTU3_F_MSF_RSB.jpg

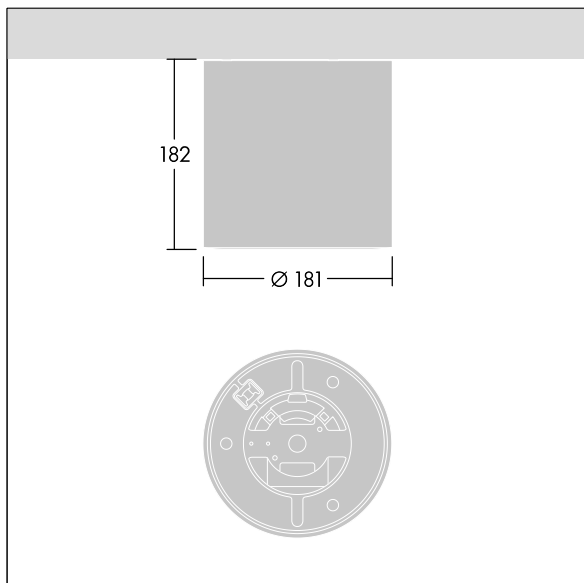

TLG_CTU3_M_MSF.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Cetus

92946819 CETUS3 MSF 3000-830 HFIX RSB

THORN