


## 92947255 CETUS3 MSF 3000-840 HFIX RSB




### Cetus

Surface mounted LED downlight. DALI dimmable LED driver SwitchDIM compatible. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 4000K LED

Dimensions: Ø181 x 182 mm  
 Luminaire input power: 25.4 W  
 Luminaire luminous flux: 3153 lm  
 Luminaire efficacy: 124 lm/W  
 Weight: 2.71 kg



TLG\_CTU3\_F\_MSF\_RSB.jpg

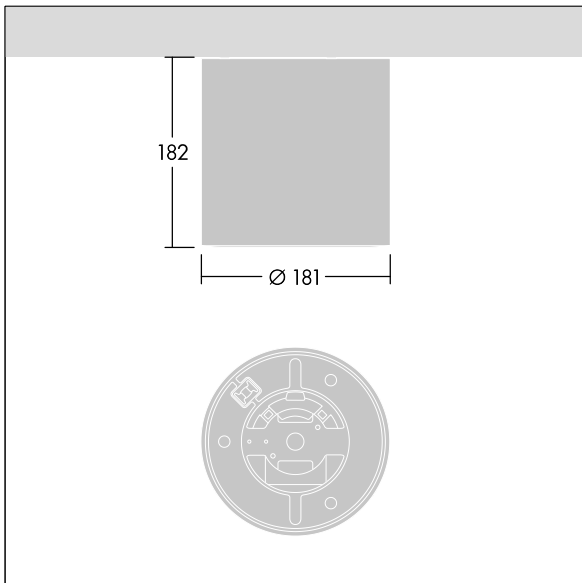

TLG\_CTU3\_M\_MSF.wmf

This product contains a light source of energy efficiency class C.

**Cetus**

**92947255 CETUS3 MSF 3000-840 HFIX RSB**

**THORN**