

92948315 CETUS3 MSF 2000-830 HFIX RSB

IEC EN 60598-1 RG 1	UK CA	IP43	halogen	IK06	⊕	CE	⚡	850°C	T _a -20 +25
---------------------------	----------	------	---------	------	---	----	---	-------	---------------------------


Cetus

Surface mounted LED downlight. DALI dimmable LED driver SwitchDIM compatible. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block, Housing mounts to installation plate with twist and lock bayonet mechanism. Complete with 3000K LED

Dimensions: Ø181 x 182 mm
 Luminaire input power: 15.5 W
 Luminaire luminous flux: 1923 lm
 Luminaire efficacy: 124 lm/W
 Weight: 2.71 kg



TLG_CTU3_F_MSF_RSB.jpg

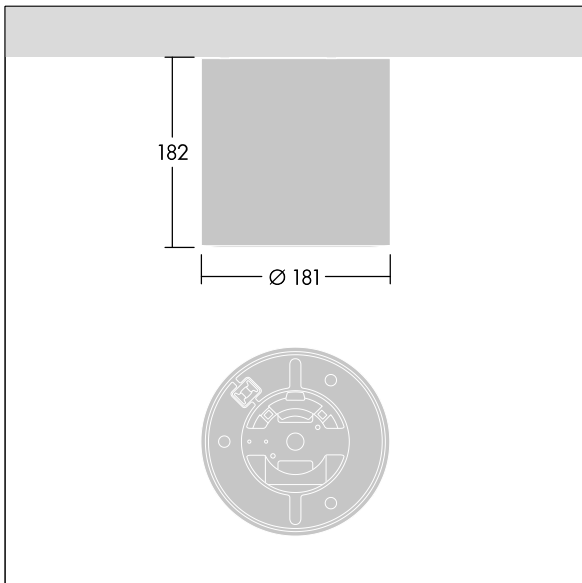

TLG_CTU3_M_MSF.wmf

This product contains a light source of energy efficiency class D.

Cetus

92948315 CETUS3 MSF 2000-830 HFIX RSB

THORN