


92952672 CETUS3 M 3000-830 EHF RSB




Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44_IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 3000K LED

Dimensions: Ø195 x 100 mm
 Luminaire input power: 26.9 W
 Luminaire luminous flux: 3023 lm
 Luminaire efficacy: 112 lm/W
 Weight: 0.69 kg



TLG_CTU3_F_M_LED_RSB_Persp.jpg

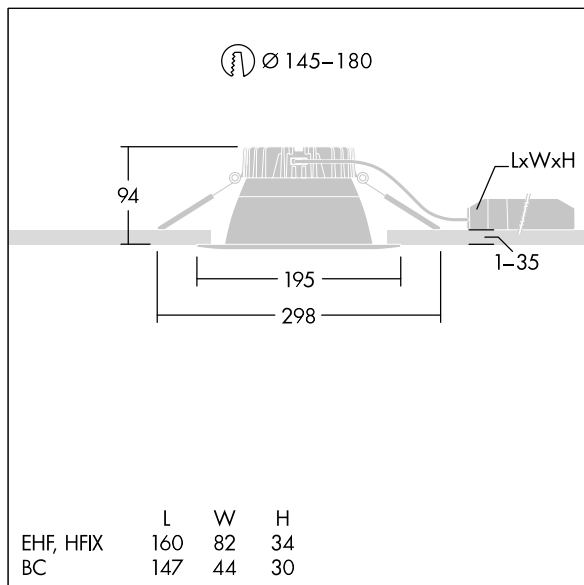

TLG_CTU3_M_EHFM.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
 © Thorn Lighting

Cetus

92952672 CETUS3 M 3000-830 EHF RSB

THORN