

## E7477370 / 92953620 CETUS3 MSF -LCS EHF RSB

IEC EN 60598-1 RG 1	UK CA	IP43	halogen	IK03	⊕	CE	LED	850°C	T <sub>a</sub> -20 +25	
---------------------------	----------	------	---------	------	---	----	-----	-------	---------------------------	--

### Cetus


Surface mounted LED downlight. Fixed output LED driver. Body: die-cast aluminium. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Trim: high quality, highly reflective polycarbonate. Class I electrical, IP43. Installation plate to be fitted directly to ceiling, for mounting via BESA box or wire suspension use available accessory. Electrical connection via 3/5 pole, push in, terminal block. Housing mounts to installation plate with twist and lock bayonet mechanism.

Equipped with LCS technology, with two lumen outputs (800lm and 1500lm) and three colour temperatures (3000K, 3500K and 4000K) selectable from below by a rotary switch. Pre-set to 4000K, high luminous flux..

Dimensions: Ø181 x 182 mm  
Luminaire input power: 25.3 W  
Luminaire luminous flux: 3152 lm  
Luminaire efficacy: 125 lm/W  
Weight: 2.7 kg



TLG\_CTU3\_F\_MSF\_RSB.jpg

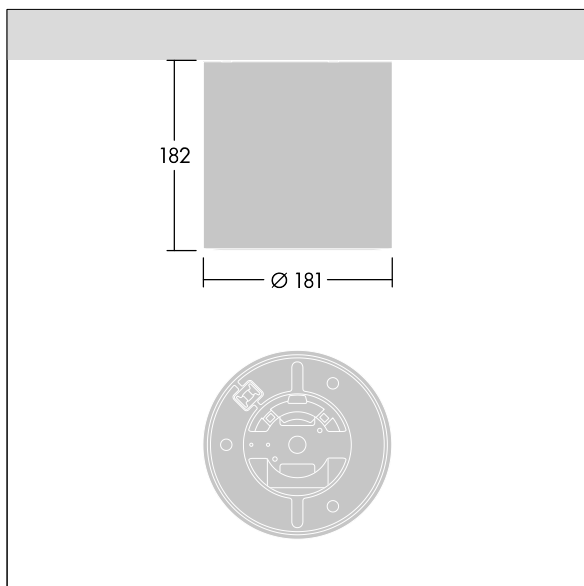

TLG\_CTU3\_M\_MSF.wmf

**Cetus**

**E7477370 / 92953620 CETUS3 MSF -LCS EHF RSB**

**THORN**