

## 92954094 CETUS3 M 3000-840 EHF RSB

IEC EN 60598-1 RG 1	UK CA	11	IP20 ↑ IP44	halogen	IK 06	CE	850°C	T <sub>a</sub> -20 +25	
---------------------------	----------	----	----------------	---------	-------	----	-------	---------------------------	--


## Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø145-180 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44 IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

Dimensions: Ø195 x 100 mm  
 Luminaire input power: 26.9 W  
 Luminaire luminous flux: 3153 lm  
 Luminaire efficacy: 117 lm/W  
 Weight: 0.69 kg



TLG\_CTU3\_F\_M\_LED\_RSB\_Persp.jpg

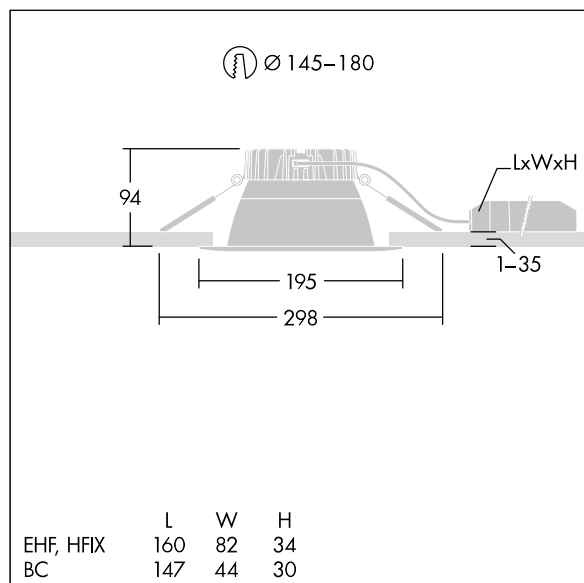

TLG\_CTU3\_M\_EHFM.wmf

This product contains a light source of energy efficiency class C.

**Cetus**

**92954094 CETUS3 M 3000-840 EHF RSB**

THORN