

92954518 CETUS3 L 3000-840 EHF RSB

IEC EN 60598-1 RG 1	UK CA	11	IP20 ↑ IP44	halogen	IK 06	CE	850°C	T _a -20 +25	
---------------------------	----------	----	----------------	---------	-------	----	-------	---------------------------	--


Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø190-230 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44 IP20. Spring clips suitable for ceiling thicknesses from 1 to 35 mm. Complete with 4000K LED

Dimensions: Ø248 x 100 mm
 Luminaire input power: 26.9 W
 Luminaire luminous flux: 3388 lm
 Luminaire efficacy: 126 lm/W
 Weight: 0.81 kg



TLG_CTU3_F_L_LED_RSB_Persp.jpg

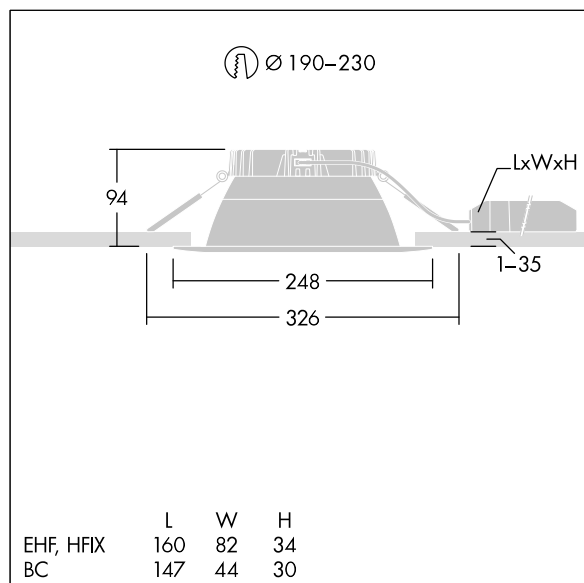

TLG_CTU3_M_EHFL.wmf

This product contains a light source of energy efficiency class C.

Cetus

92954518 CETUS3 L 3000-840 EHF RSB

THORN