

Punch

THORN

96635726 PUNCH 3 LV MSP 6600-840 L15 HFIX E3

| | | | | | | | | | |
|----------|------|------|---|----|---|---|-------|-------------------------|--|
| UK CA | IP20 | IK03 | ⊕ | CE |  |  | 650°C | T _a 0 +25 | |
|----------|------|------|---|----|---|---|-------|-------------------------|--|

Punch


A slim, suspended luminaire with direct/indirect distribution. DALI dimmable Electronic, with 3 hour, manual test, emergency lighting circuit. Body: sheet steel, powder coated white (close to RAL9016). Endcaps: sheet steel powder coated white (close to RAL9016). Louvre: glossy aluminium,. Class I electrical, IP20, Impact strength: IK03. Electrical connection via pre-installed power cord (2.5m). Complete with 4000K LED. Suspension kit to be ordered separately.

Y-Suspension connector included - Suspension cord with ceiling rose to be ordered separately (22171581).

Dimensions: 1581 x 162 x 56 mm
Luminaire input power: 48 W
Luminaire luminous flux: 7091 lm
Luminaire efficacy: 148 lm/W
Weight: 3.8 kg



TLG_PNCH_F_LOUVRE_recessed_on.jpg

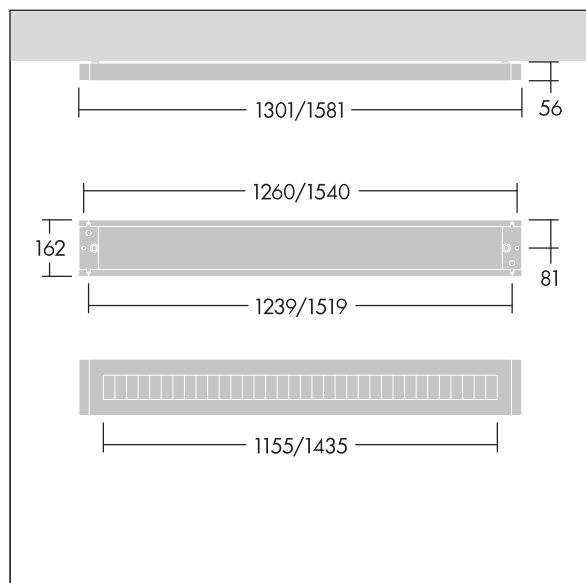

TLG_PNC3_M_LV_RESD.wmf

This product contains light sources of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at $\pm 10\%$. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Punch

96635726 PUNCH 3 LV MSP 6600-840 L15 HFIX E3

THORN