

Cetus

92955328 CETUS3 S 800-840 EHF RSB

IEC EN 60598-1 RG 1	UK CA	11	IP20 IP44	halogen	IK 06	CE	850°C	T _a -20 +25	
------------------------	----------	----	--------------	---------	-------	----	-------	---------------------------	--


Cetus

A low height, recessed LED downlight. Suitable for ceiling cut-outs Ø95-125 mm for easy refurbishments or fast initial installations. Remote, pluggable, Fixed output LED driver with DC functionality, adjustable 50-100%, NFC configurable. Loop in - loop out possible. Body: die-cast aluminium for thermal management. Diffuser: polycarbonate, smooth reflector in satinbrite finish with wide beam. Reflector and trim: high quality, highly reflective polycarbonate. Class II electrical, IP44 IP20. Spring clips suitable for ceiling thicknesses from 1 to 25 mm. Complete with 4000K LED

Dimensions: Ø137 x 80 mm
 Luminaire input power: 7.8 W
 Luminaire luminous flux: 784 lm
 Luminaire efficacy: 101 lm/W
 Weight: 0.43 kg



TLG_CTU3_F_S_LED_RSB_Persp.jpg

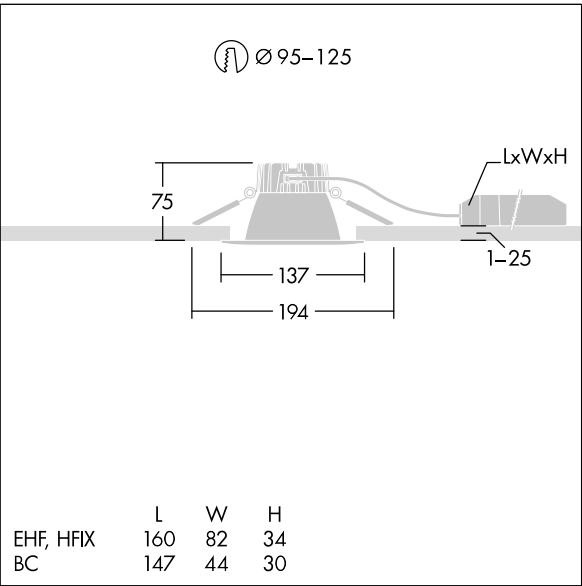

TLG_CTU3_M_EHFS.wmf

This product contains a light source of energy efficiency class C.

Cetus

92955328 CETUS3 S 800-840 EHF RSB

THORN