

96670239 UD 24L50 730 EWC CL2 HFX WS5 MSU-T BK U0

ISO 9223 C3	ida DARK SKY APPROVED		IP66	IK09		CE			T <sub>a</sub> 35	
----------------	--------------------------	--	------	------	--	----	--	--	-------------------	--

## Urba Deco

A smart, sophisticated architectural urban lantern with 24 LEDs driven at 500mA and a Extra Wide Street & Comfort optic with no upward light. Electronic, fixed output control gear. Class II electrical, IP66, Impact strength: IK09. Canopy and base: die-cast aluminium (AS9U3, LM24 equivalent, EN AC-46000) textured black (close to RAL9005). Enclosure: 6mm thick clear glass. Suspended through 34G, luminaire perpendicular to the road. Complete with 3000K LED.

Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode.

Dimensions: 510 x 241 x 146 mm

Luminaire input power: 36.1 W

Luminaire luminous flux: 5382 lm


Luminaire efficacy: 149 lm/W

Weight: 7.07 kg

Scx: 0.031 m<sup>2</sup>



TLG\_URBD\_F\_MSUPDB.jpg

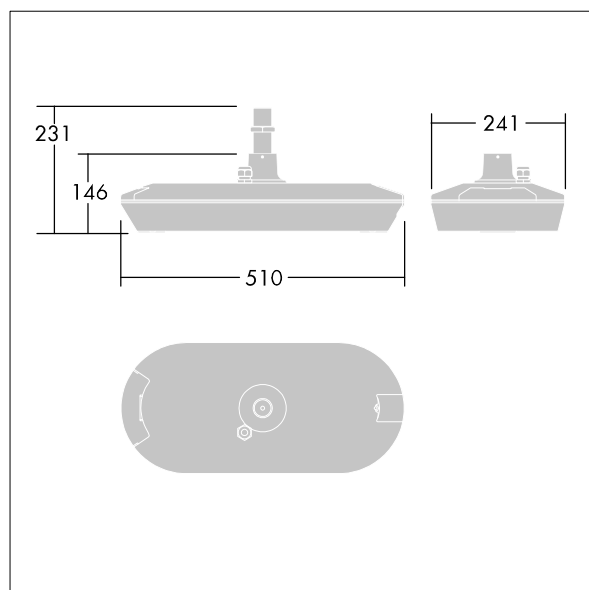

TLG\_URBD\_M\_MUS.wmf

This product contains a light source of energy efficiency class D.