

# Candle Bollard

96679077 CN B 8L50 830 RSC CL1 MPL ANT

THORN

ISO 9223 C5	IP66	IK10					T <sub>a</sub> 25	
----------------	------	------	---	---	---	---	-------------------	--

## Candle Bollard

Environmentally respectful bollard with limited upward lighting emission with 8 LEDs driven at 500mA with Radial symmetrical comfort light distribution. Fixed output LED driver. Class I electrical, IP66, IK10. Base: die-cast aluminium (EN AC-44300). Finish: powder coated aluminium, texturized anthracite (close to RAL7043). Diffuser: UV stabilised clear polycarbonate. Flange mounted. Complete with 3000K LED.

Dimensions: Ø234 x 1017 mm

Luminaire input power: 14 W


Weight: 7.98 kg

Scx: 0.06 m<sup>2</sup>

Luminaire efficacy: 91 lm/W



TLG\_CNDB\_F\_MPL.jpg

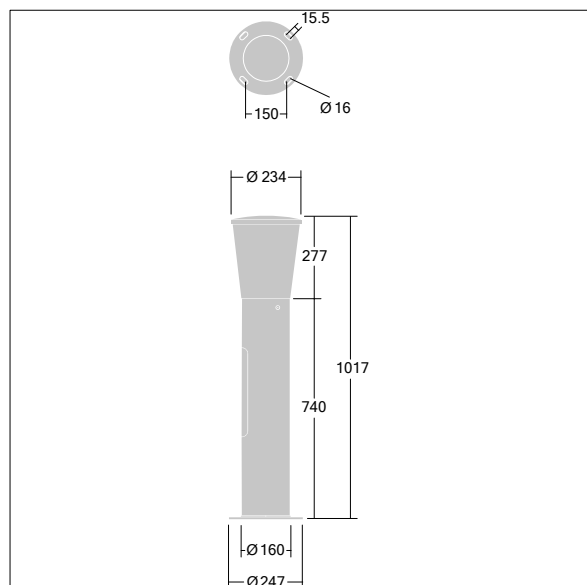

TLG\_CNDB\_M\_MPL.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

# Candle Bollard

96679077 CN B 8L50 830 RSC CL1 MPL ANT

THORN