

Victor

THORN

96635787 VIC1 12L50-740 NR CL2 N8M R9006



Victor

A small size LED road and street luminaire, in a modern and timeless design. 12 LEDs driven at 500mA with Narrow Road optic. Fixed output LED driver. Class II electrical, IP66. Body in aluminium, powder coated White aluminium RAL9006. Enclosure: toughened glass. Luminaire to be suspended using brackets (Ø27G), post top, or wall mounted. Tool-free electrical connection via 2 x 2.5 mm² terminal block. Pre-wired with 8m H07-RNF cable. Complete with 4000K LED

Dimensions: Ø363 x 277 mm


Luminaire input power: 21 W

Weight: 4.81 kg

Scx: 0.084 m²



TLG_VCTR_F_65PDB.jpg

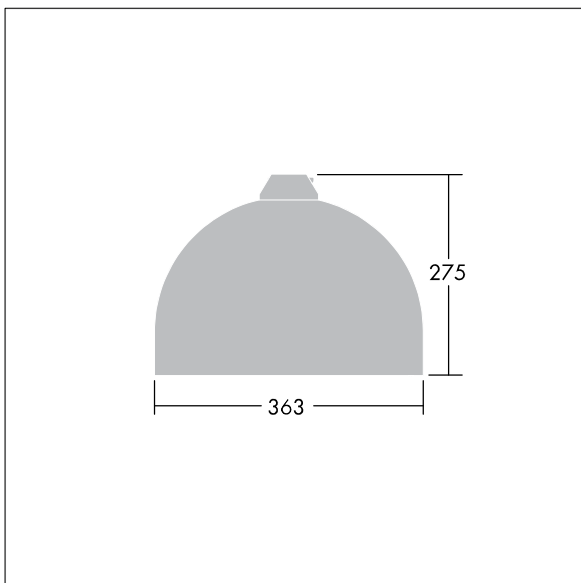

TLG_VCTR_M_SWLD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Victor

96635787 VIC1 12L50-740 NR CL2 N8M R9006

THORN