

# Victor

# THORN

96635789 VIC1 12L105-740 NR CL2 N8M R9006



## Victor

A small size LED road and street luminaire, in a modern and timeless design. 12 LEDs driven at 1050mA with Narrow Road optic. Fixed output LED driver. Class II electrical, IP66. Body in aluminium, powder coated White aluminium RAL9006. Enclosure: toughened glass. Luminaire to be suspended using brackets ( $\varnothing 27G$ ), post top, or wall mounted. Tool-free electrical connection via 2 x 2.5 mm<sup>2</sup> terminal block. Pre-wired with 8m H07-RNF cable. Complete with 4000K LED

Dimensions:  $\varnothing 363$  x 277 mm


Luminaire input power: 42 W

Weight: 4.81 kg

Scx: 0.084 m<sup>2</sup>



TLG\_VCTR\_F\_65PDB.jpg

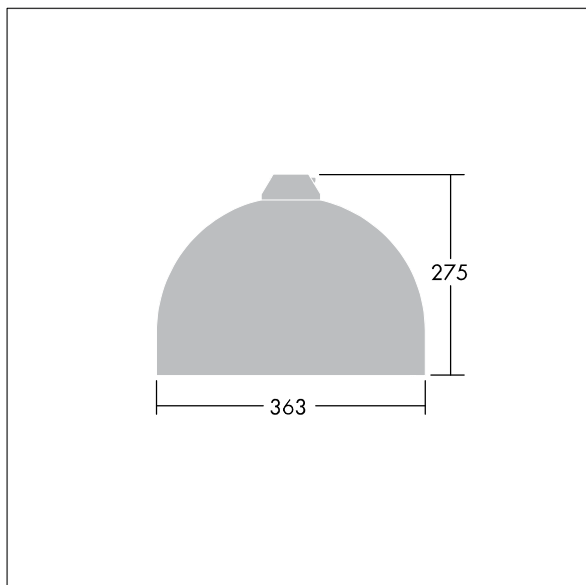

TLG\_VCTR\_M\_SWLD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting